

AUTOMATIC SELF CLEANING WATER FILTER

FW150EX

FW150EX · FW · DN 150 · Hydraulic drive

Large piston-driven automatic filter. DN150. Flow rate 180 m³/h. Hydraulic drive.

TECHNICAL DAT ASHEET



SCAN FOR PRODUCT PAGE

filtaworx.com/products/automatic-filters/fw150ex



KEY FEATURES

- Hydraulic Drive – No External Power
- Suction Scanning Technology
- Continuous Flow
- 15–17 Second Flush Cycle
- PN10/PN16 Pressure Rating
- SS304/SS316 Options

SPECIFICATIONS

Drive Type	Hydraulic
Filter Size	DN150
Flow Rate	180 m ³ /h
Filtration Area	8,115 cm ²
Filtration Degree	30, 50, 80, 100, 120, 150, 200, 300, 400, 800 µm
Operating Pressure	2.0–10 bar
Max Temperature	65 °C
Rinse Cycle	15–17 seconds

02 • DIMENSIONS

Dimensions

TABLE 1 Data & Weights

Model	DN	Flowrate	Filter area	Weight (Std)	Weight (HP)
FW150EX	DN150	180 m ³ /h	8,115 cm ²	120 kg	140 kg

TABLE 2 Dimensions

Dimension	Value
Inlet / Outlet	DN150 (6")
Body Ø	325 mm
Centre distance	900 mm
Body O/A length	1,818 mm
Filtration area	8,115 cm ²
Flow rate	180 m ³ /h (793 gpm)


TABLE 3 Shipping & weights

Item	Value
Packed dimensions (L × W × H)	280 × 55 × 76 cm
Shipping volume	1.2 m ³
Weight — standard	120 kg (265 lb)
Weight — high pressure	140 kg (310 lb)

03 • PERFORMANCE

Performance

PERFORMANCE Pressure Drop vs Flow

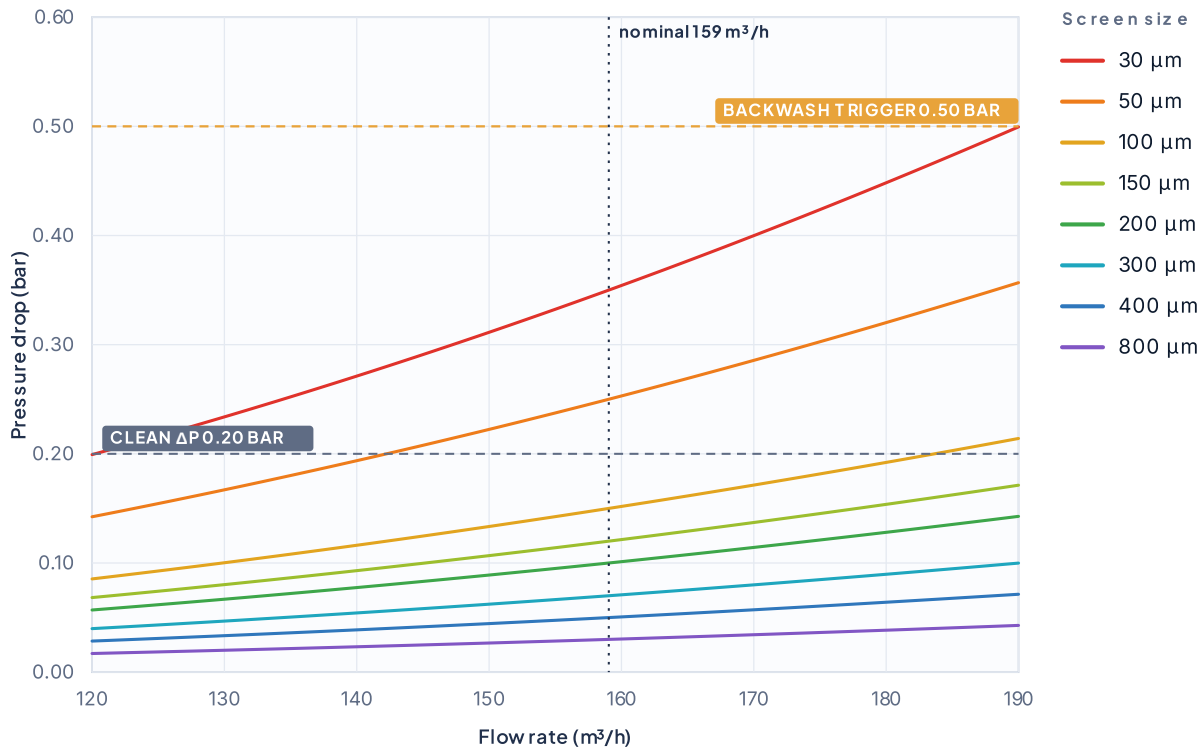

Curves: $dp(q) = r \cdot q^2$ across available screen sizes. Source per screen — 30 µm : estimated · 50 µm : estimated · 100 µm : estimated · 150 µm : estimated · 200 µm : estimated · 300 µm : estimated · 400 µm : estimated · 800 µm : estimated.

TYPICAL APPLICATIONS

Agriculture & Irrigation · Industrial Water · Water Sources · Cooling Towers · Food & Beverage · Mining

Filtaworx · Australian manufacturer of automatic self-cleaning filters

filtaworx.com/products/automatic-filters/fw150ex