

AUTOMATIC SELF CLEANING WATER FILTER

FW250EX

FW250EX · FW · DN 250 · Hydraulic drive

Large piston-driven automatic filter. DN250. Flow rate 400 m³/h. Hydraulic drive.

TECHNICAL DAT ASHEET



SCAN FOR PRODUCT PAGE

filtaworx.com/products/automatic-filters/fw250ex



KEY FEATURES

- Hydraulic Drive – No External Power
- Suction Scanning Technology
- Continuous Flow
- 15–17 Second Flush Cycle
- PN10/PN16 Pressure Rating
- SS304/SS316 Options

SPECIFICATIONS

Drive Type	Hydraulic
Filter Size	DN250
Flow Rate	400 m ³ /h
Filtration Area	10,415 cm ²
Filtration Degree	30, 50, 80, 100, 120, 150, 200, 300, 400, 800 µm
Operating Pressure	2.0–10 bar
Max Temperature	65 °C
Rinse Cycle	15–17 seconds

02 • DIMENSIONS

Dimensions

TABLE 1 Data & Weights

Model	DN	Flowrate	Filter area	Weight (Std)	Weight (HP)
FW250EX	DN250	400 m ³ /h	10,415 cm ²	235 kg	270 kg

TABLE 2 Dimensions

Dimension	Value
Inlet / Outlet	DN250 (10")
Body Ø	406 mm
Centre distance	1,100 mm
Body O/A length	2,531 mm
Filtration area	10,415 cm ²
Flow rate	400 m ³ /h (1,761 gpm)


TABLE 3 Shipping & weights

Item	Value
Packed dimensions (L x W x H)	340 x 63 x 83 cm
Shipping volume	1.3 m ³
Weight — standard	235 kg (520 lb)
Weight — high pressure	270 kg (595 lb)

03 • PERFORMANCE

Performance

PERFORMANCE Pressure Drop vs Flow

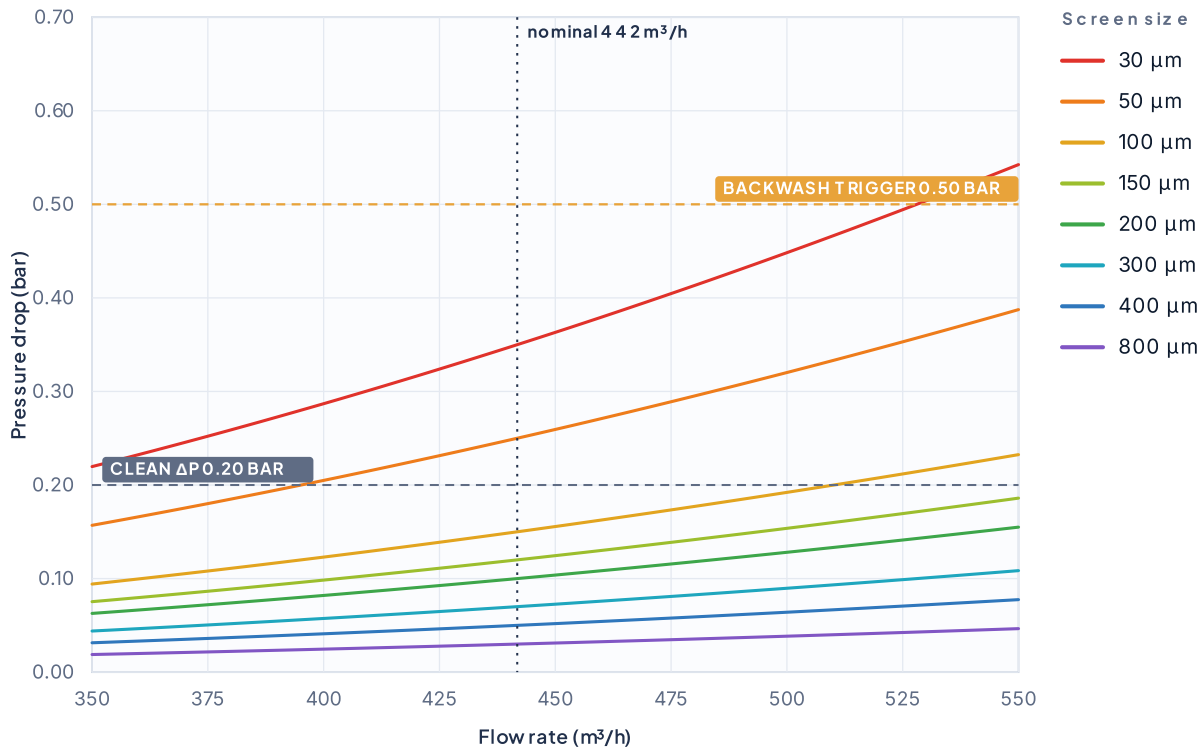

Curves: $dp(q) = r \cdot q^2$ across available screen sizes. Source per screen — 30 μm : estimated · 50 μm : estimated · 100 μm : estimated · 150 μm : estimated · 200 μm : estimated · 300 μm : estimated · 400 μm : estimated · 800 μm : estimated.

TYPICAL APPLICATIONS

Agriculture & Irrigation · Industrial Water · Water Sources · Cooling Towers · Food & Beverage · Mining

Filtaworx · Australian manufacturer of automatic self-cleaning filters

filtaworx.com/products/automatic-filters/fw250ex