

AUTOMATIC SELF CLEANING WATER FILTER

FW400

FW400 · FW · DN 400 · Hydraulic drive

Large piston-driven automatic filter. DN400. Flow rate 1,100 m³/h. Hydraulic drive.

TECHNICAL DATASHEET



SCAN FOR PRODUCT PAGE

filtaworx.com/products/automatic-filters/fw400



KEY FEATURES

- Hydraulic Drive – No External Power
- Suction Scanning Technology
- Continuous Flow
- 15–17 Second Flush Cycle
- PN10/PN16 Pressure Rating
- SS304/SS316 Options

SPECIFICATIONS

Drive Type	Hydraulic
Filter Size	DN400
Flow Rate	1,100 m ³ /h
Filtration Area	12,170 cm ²
Filtration Degree	30, 50, 80, 100, 120, 150, 200, 300, 400, 800 µm
Operating Pressure	2.0–10 bar
Max Temperature	65 °C
Rinse Cycle	15–17 seconds

02 • DIMENSIONS

Dimensions

TABLE 1 Data & Weights

Model	DN	Flowrate	Filter area	Weight (Std)	Weight (HP)
FW400	DN400	1,100 m ³ /h	12,170 cm ²	340 kg	380 kg

TABLE 2 Dimensions

Dimension	Value
Inlet / Outlet	DN400 (16")
Body Ø	457 mm
Centre distance	1,270 mm
Body O/A length	2,531 mm
Filtration area	12,170 cm ²
Flow rate	1,100 m ³ /h (4,843 gpm)


TABLE 3 Shipping & weights

Item	Value
Packed dimensions (L × W × H)	340 × 63 × 83 cm
Shipping volume	1.3 m ³
Weight — standard	340 kg (750 lb)
Weight — high pressure	380 kg (840 lb)

03 • PERFORMANCE

Performance

PERFORMANCE Pressure Drop vs Flow

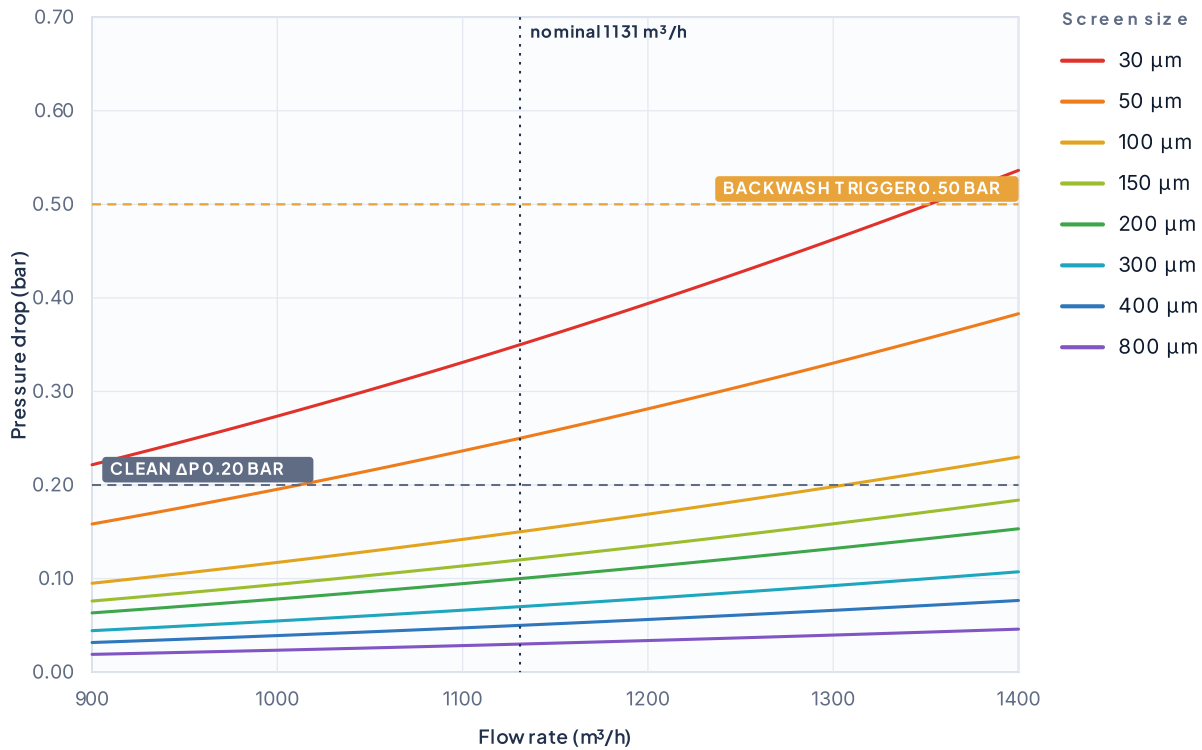

Curves: $dp(q) = r \cdot q^2$ across available screen sizes. Source per screen — 30 μm : estimated · 50 μm : estimated · 100 μm : estimated · 150 μm : estimated · 200 μm : estimated · 300 μm : estimated · 400 μm : estimated · 800 μm : estimated.

TYPICAL APPLICATIONS

Agriculture & Irrigation · Water Sources · Cooling Towers · Industrial Water · Mining

Filtaworx · Australian manufacturer of automatic self-cleaning filters

filtaworx.com/products/automatic-filters/fw400