


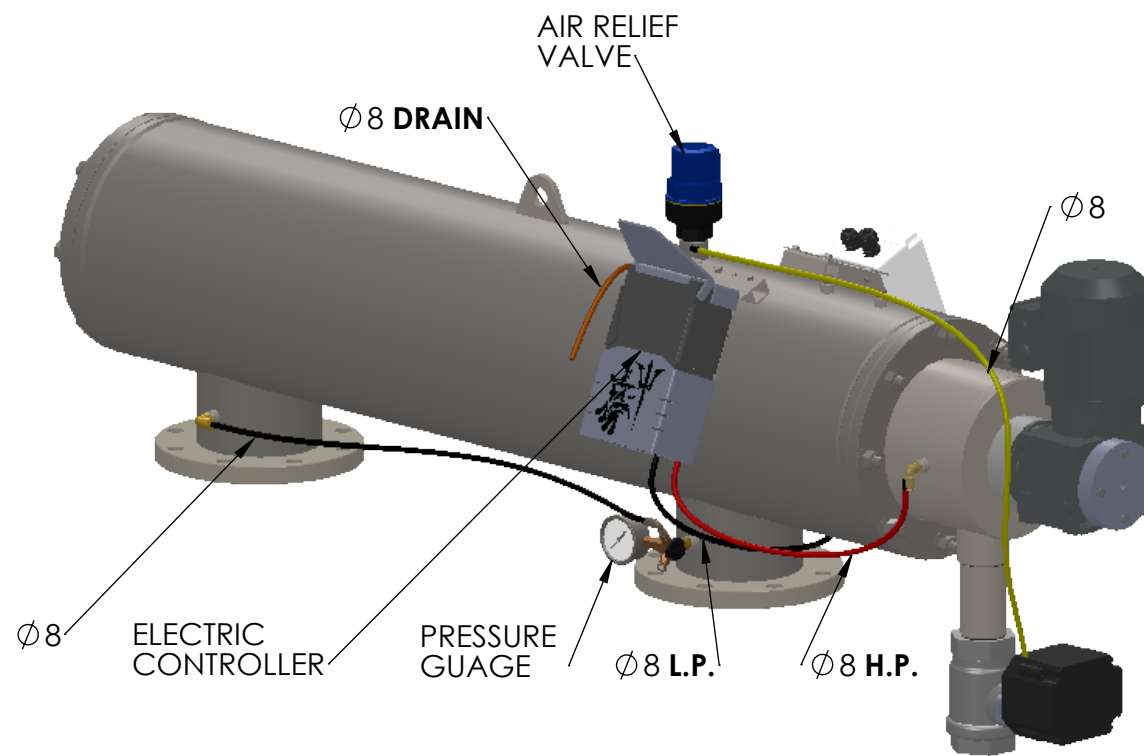

#### TECHNICAL DATA:

Normal Flow Rate: 550 GPM / 150 cubic m/hr at 2m Head Loss

Filter Area: 869 sq in / 5603 sq cm  
Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 150psi / 10 bar  
Min. Upstream Line Pressure Required During Rinse Cycle: 15 psi / 1 bar

Max. Working Temperature: 150°F / 65°C




Approximate Rinse Cycle Time: 20 Sec.

Inlet & Outlet Connection: DN150 Table E / ISO PN10 / ANSI CL150


Flush Drain Outlet Connection: 2" BSPT Female  
Main Drain Header: DN50 2" Nominal Bore

Approximate Weight: Empty ----- 309 lbs / 140 kg  
Full of Water --- 933 lbs / 423 kg

| General Table |            |
|---------------|------------|
| MOTOR DATA    |            |
| 0.25 kW       | rpm1405/36 |
| 50 Hz         | V230/400   |

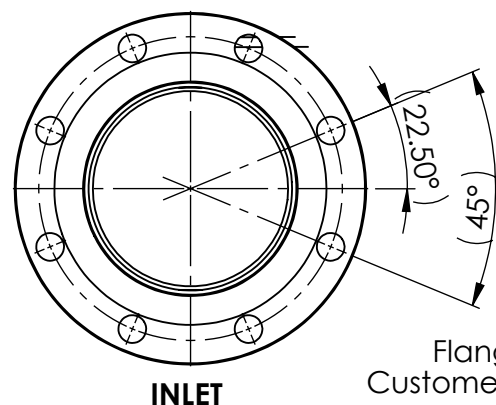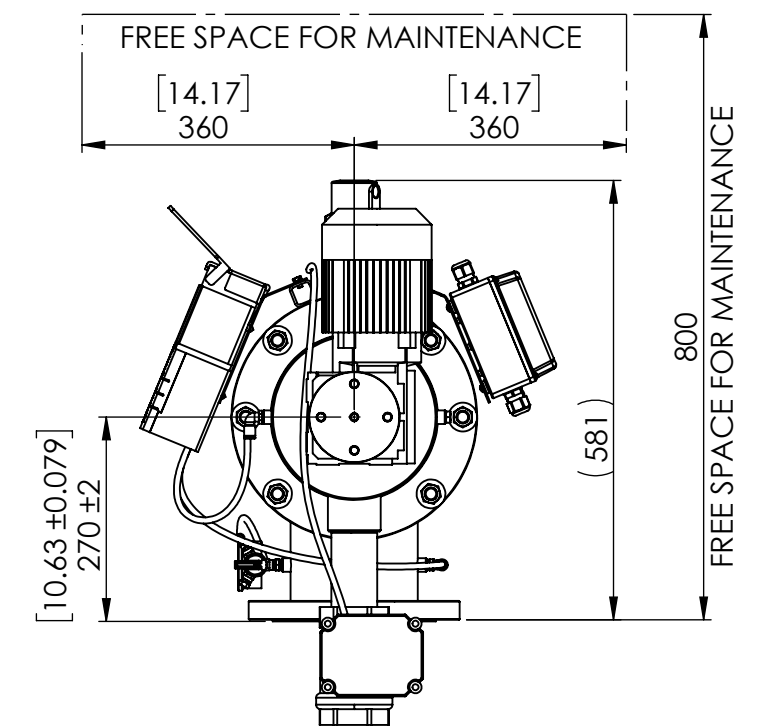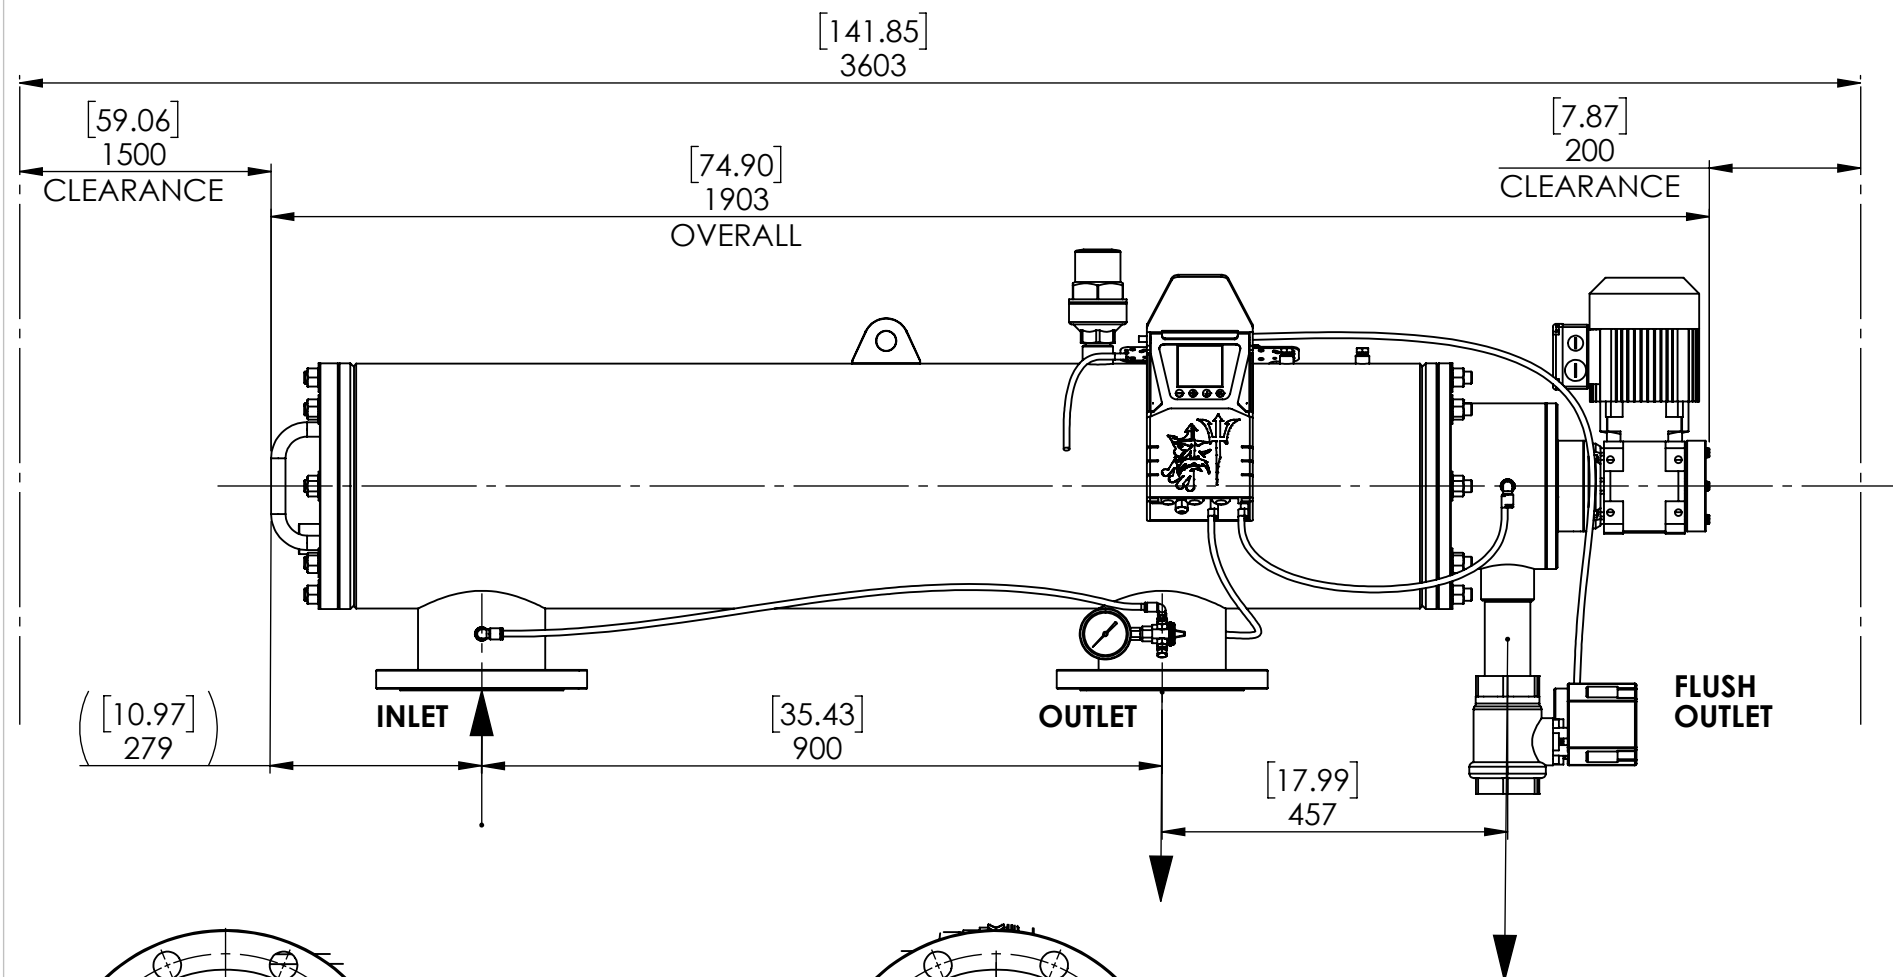

Flange Details Depend  
Customer Selected Flange Type

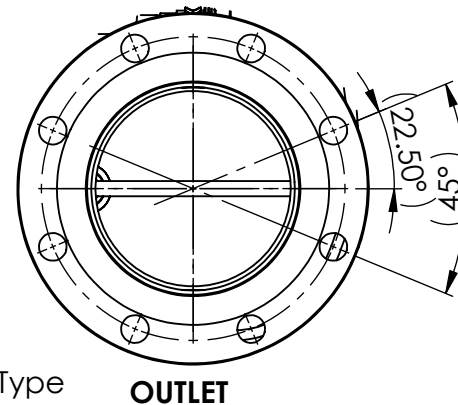

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
FILTAWORX PTY. LTD. ANY REPRODUCTION  
IN PART OR AS A WHOLE WITHOUT THE  
WRITTEN PERMISSION OF FILTAWORX PTY.  
LTD. IS PROHIBITED.


DIMENSIONS ARE IN mm

MATERIAL

AS SPECIFIED

FINISH

|                |        |
|----------------|--------|
| TOL. MACHINING | ±0.25  |
| TOL. ANGULAR   | ±0.25° |



**FILTAWORX**

TITLE

**FED150WATER FILTER**  
ELECTRIC DRIVE AUTO SELF CLEANING  
DN150 TABLE E / ISO PN10 / ANSI CL150

| SIZE | DWG. NO. | REV. |
|------|----------|------|
| A3   | GA-04657 | 0    |

|              |                       |               |
|--------------|-----------------------|---------------|
| SCALE: 1:10. | WEIGHT: 135726.54 kg. | SHEET: 1 OF 1 |
|--------------|-----------------------|---------------|