


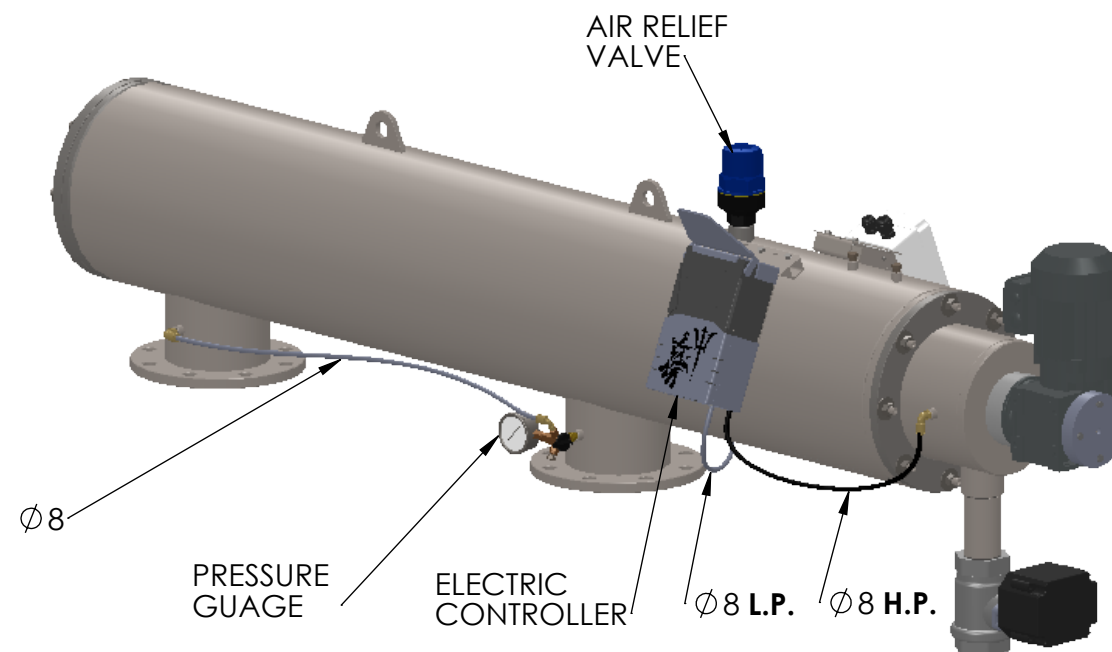

TECHNICAL DATA:

Normal Flow Rate: 793 GPM / 180 cubic m/hr at 2m Head Loss

Filter Area: 1257.83 sq in / 8115 sq cm
Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 150psi / 10 bar
Min. Upstream Line Pressure Required During Rinse Cycle: 15 psi / 1 bar

Max. Working Temperature: 150°F / 65°C




Approximate Rinse Cycle Time: 20 Sec.

Inlet & Outlet Connection: DN150 Table E / ISO PN10 / ANSI CL150

Flush Drain Outlet Connection: 2" BSPT Female
Main Drain Header: DN50 2" Nominal Bore


Approximate Weight: Empty ----- 331 lbs / 150 kg
Full of Water --- 662 lbs / 300 kg

MOTOR DATA	
0.25 kW	rpm1405/36
50 Hz	V230/400

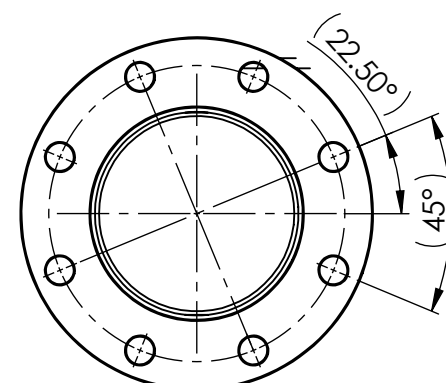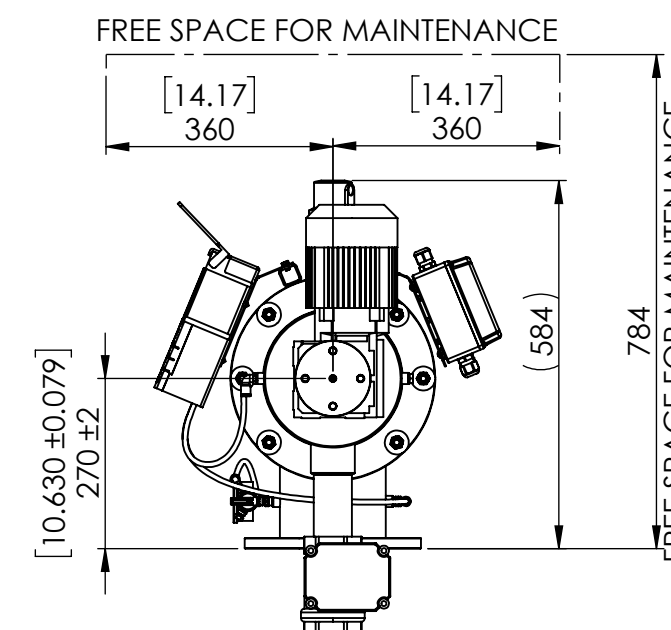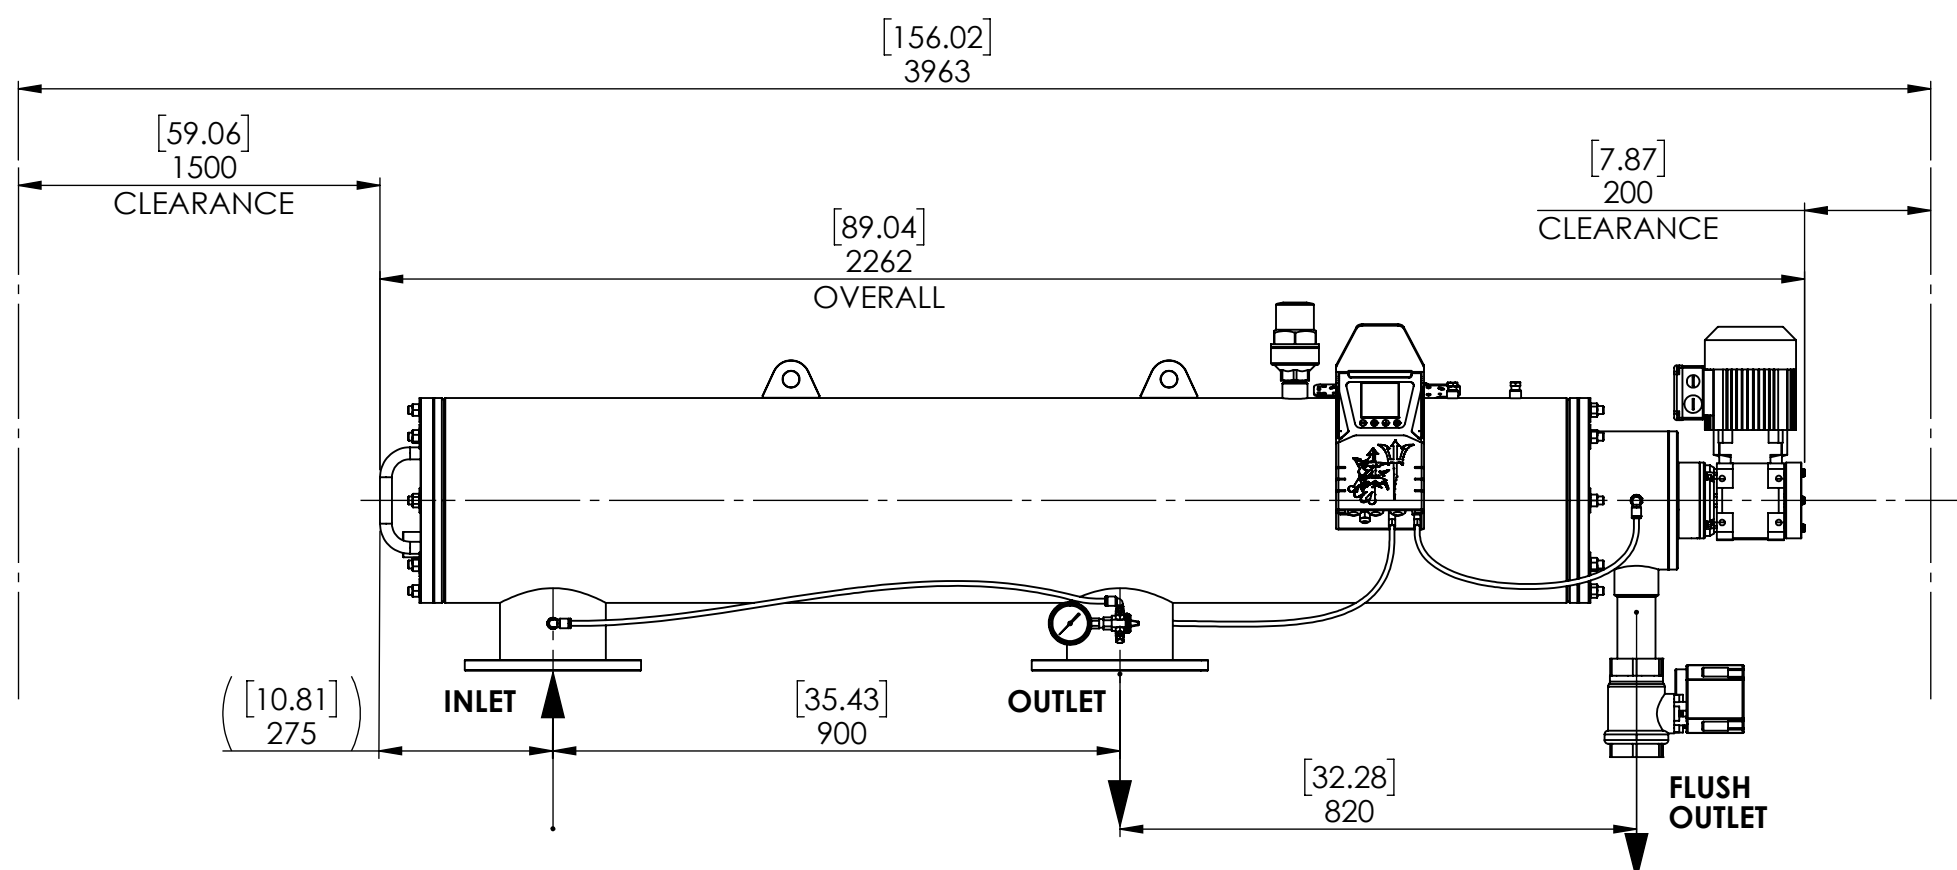

INLET

Flange Details Depend
Customer Selected Flange Type

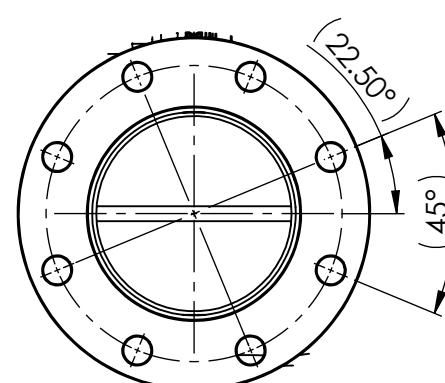

OUTLET

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FILTAWORX PTY. LTD. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FILTAWORX PTY.
LTD. IS PROHIBITED.

DIMENSIONS ARE IN mm

MATERIAL

AS SPECIFIED

FINISH



-

TOL. MACHINING

±0.25

TOL. ANGULAR

±0.25°



FILTAWORX

TITLE

FED150EX WATER FILTER
ELECTRIC DRIVE AUTO SELF CLEANING
DN150 TABLE E / ISO PN10 / ANSI CL150

SIZE
A3

DWG. NO.

GA-04757

REV.
0

SCALE: 1:12.

WEIGHT: 122221.67 kg.

SHEET: 1 OF 1