


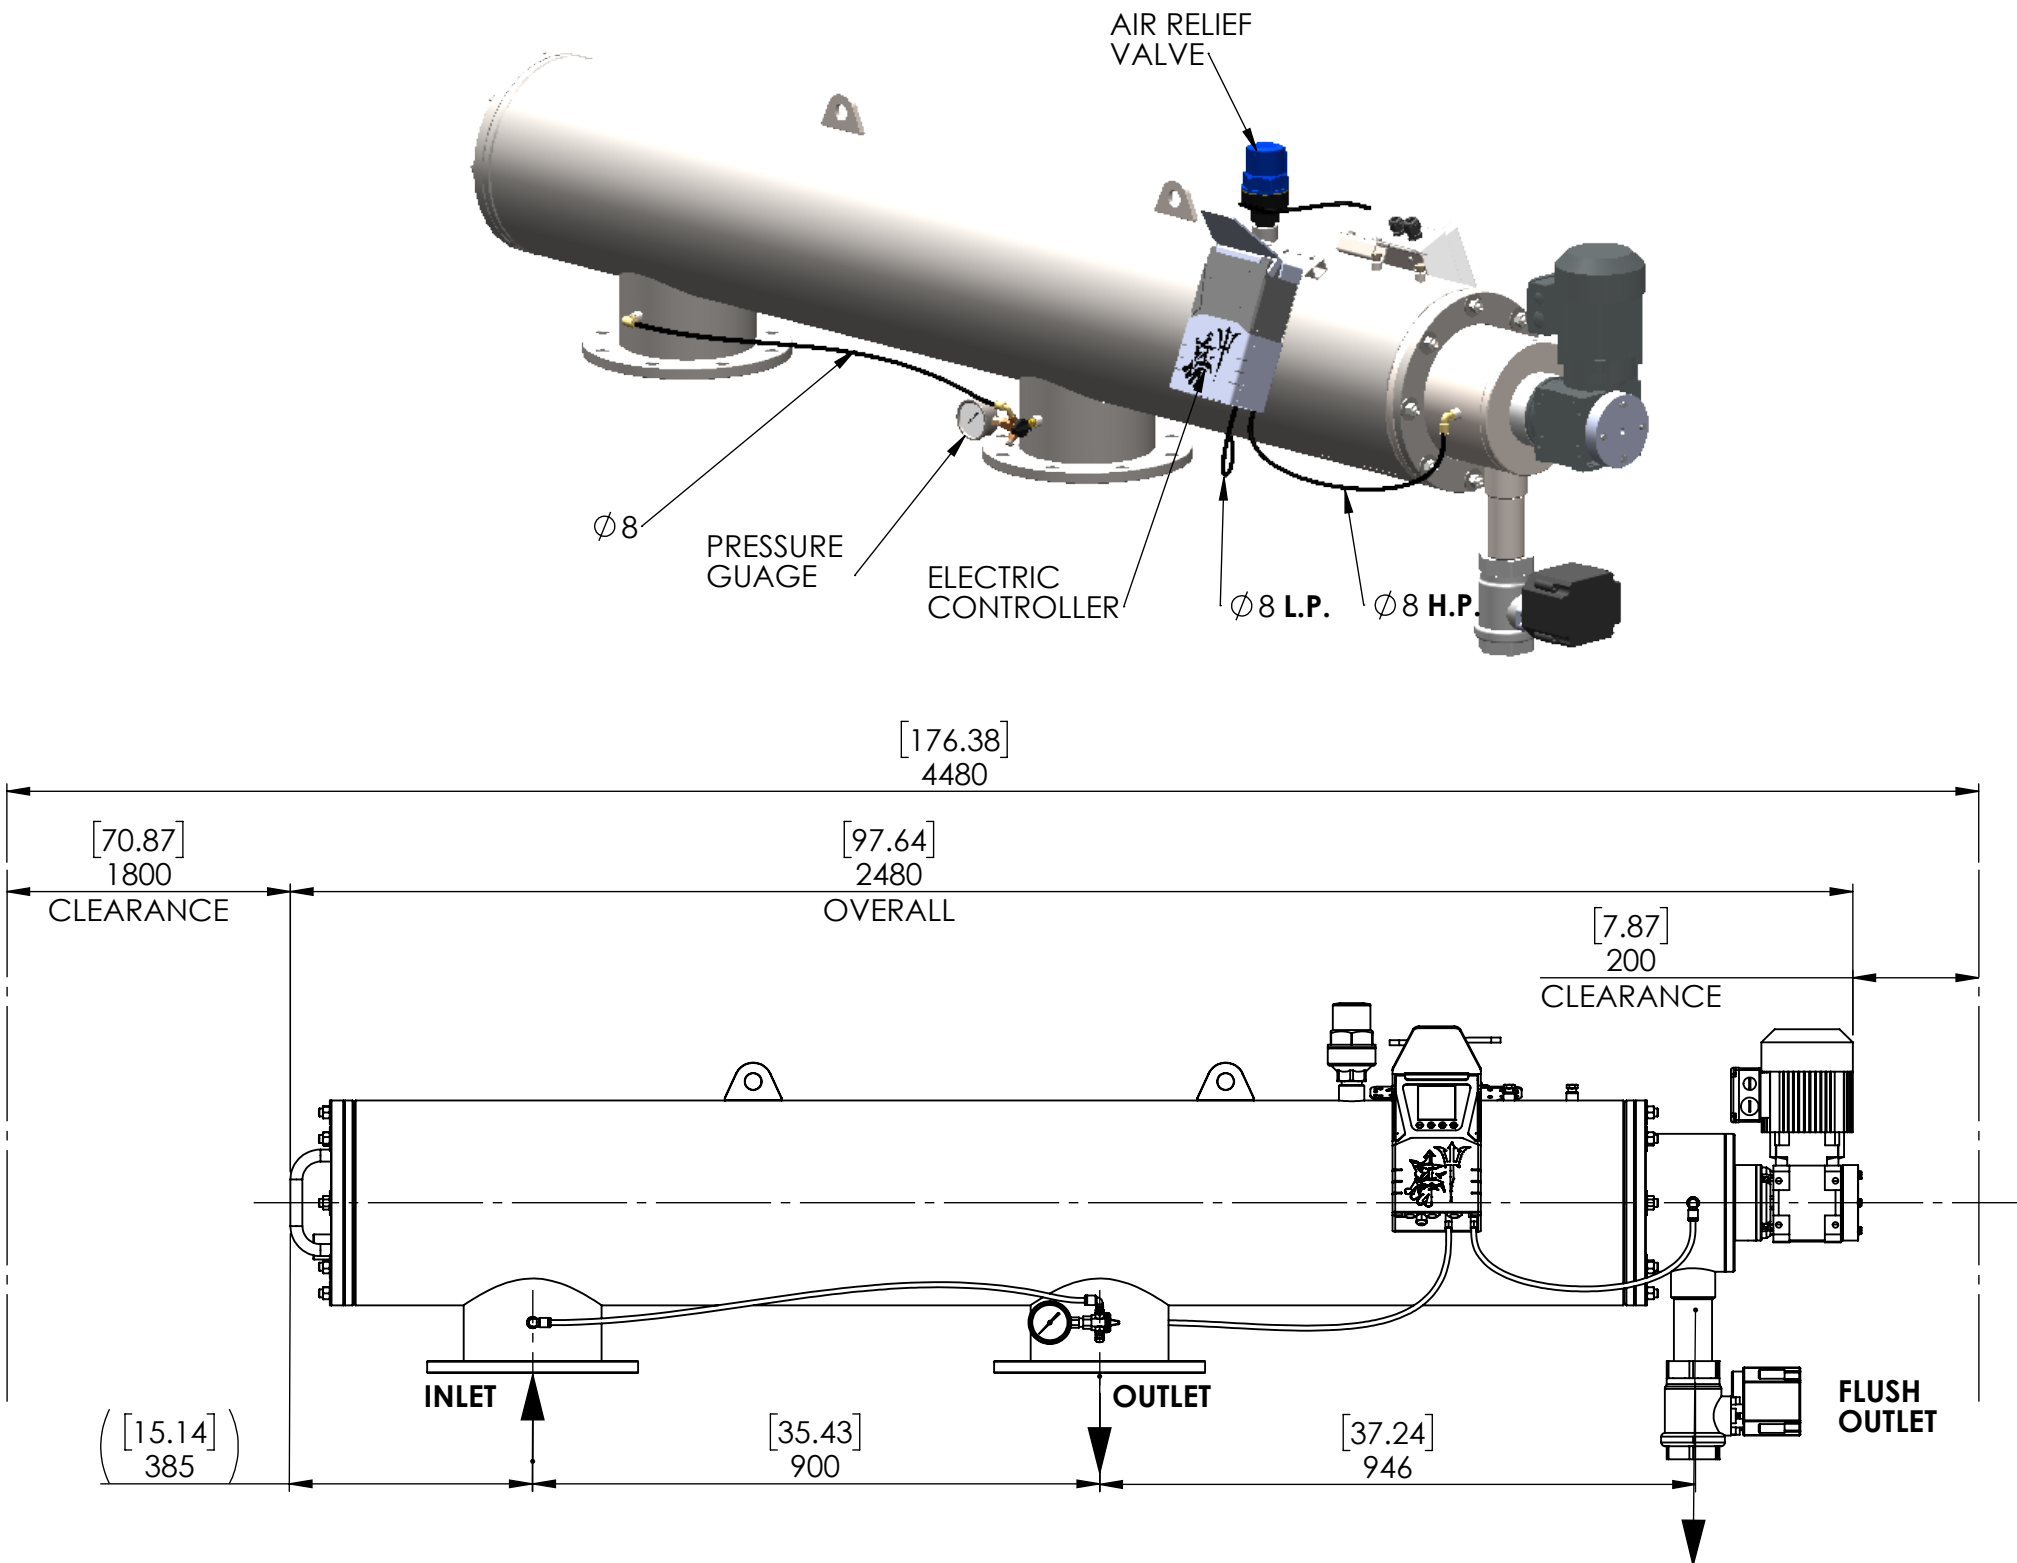

TECHNICAL DATA:

Normal Flow Rate: 1409 GPM / 320 cubic m/hr at 2m Head Loss

Filter Area: 1257.83 sq in / 8115 sq cm

Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 363psi / 25 bar

Min. Upstream Line Pressure Required During Rinse Cycle: 15 psi / 1 bar

Max. Working Temperature: 150°F / 65°C

Approximate Rinse Cycle Time: 20 Sec.



Inlet & Outlet Connection: DN200 Table E / ISO PN10 / ANSI CL150

Flush Drain Outlet Connection: 2" BSPT Female

Main Drain Header: DN50 2" Nominal Bore

Approximate Weight: Empty ----- 364 lbs / 165 kg
Full of Water --- 933 lbs / 423 kg

General Table	
MOTOR DATA	
0.25 kW	rpm1405/36
50 Hz	V230/400

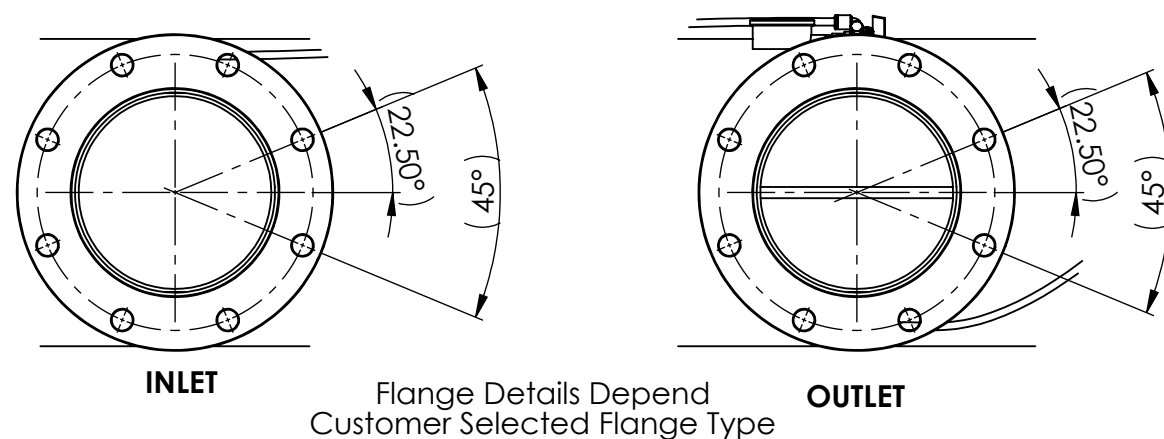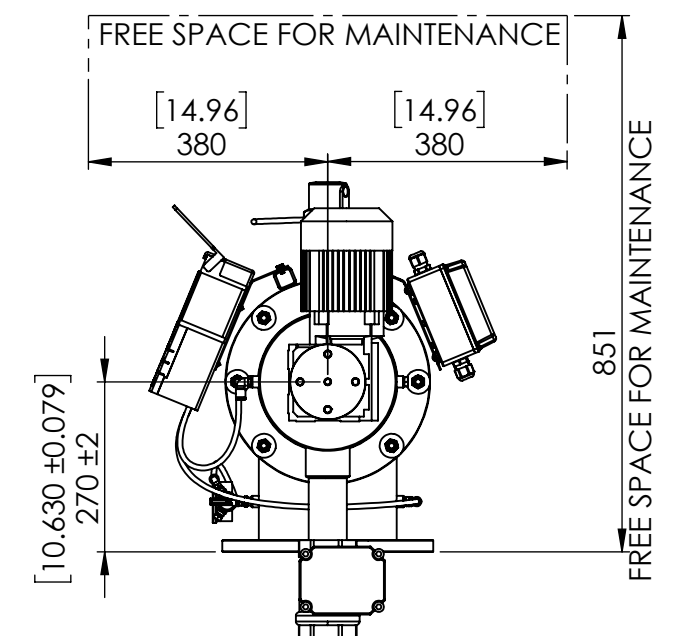

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FILTAWORX PTY. LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FILTAWORX PTY. LTD. IS PROHIBITED.


DIMENSIONS ARE IN mm

MATERIAL

SEE NOTE

FINISH

TOL. MACHINING	±0.25
TOL. ANGULAR	±0.25°



FILTAWORX

TITLE

FED 200 WATER FILTER
ELECTRIC DRIVE AUTO SELF CLEANING
DN200 TABLE E / ISO PN10 / ANSI CL150

SIZE A3	DWG. NO. GA-04857	REV. 0
------------	----------------------	-----------

SCALE: 1:12.	WEIGHT: 133576.13 kg.	SHEET: 1 OF 1
--------------	-----------------------	---------------