


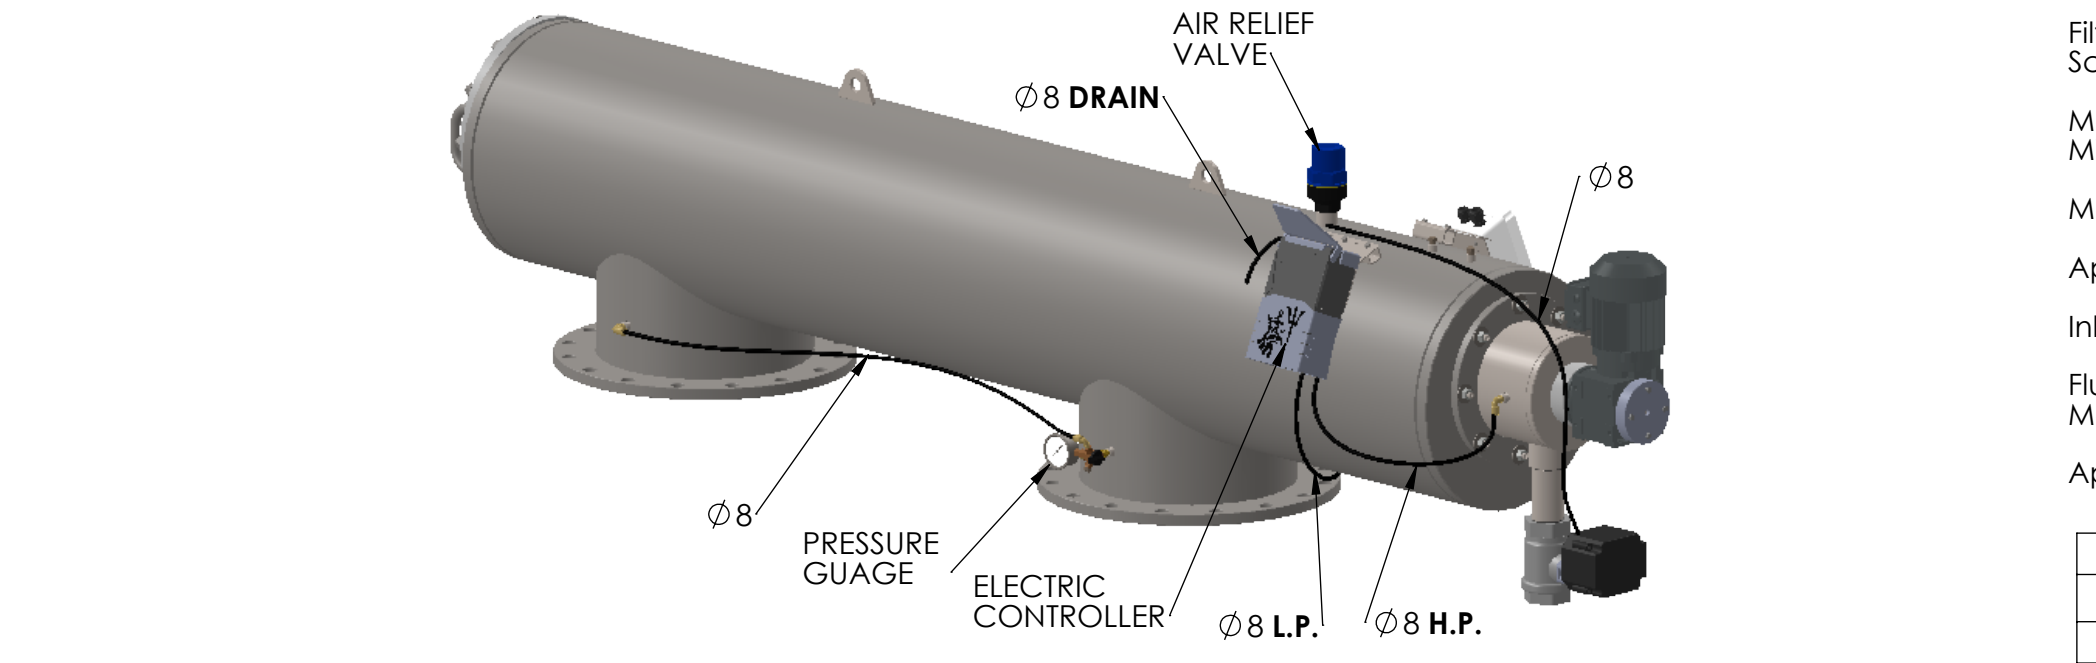

TECHNICAL DATA:

Normal Flow Rate: 4843 GPM / 1100 cubic m/hr at 2m Head Loss

Filter Area: 1886.35 sq in / 12170 sq cm
Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 150psi / 10 bar
Min. Upstream Line Pressure Required During Rinse Cycle: 15 psi / 1 bar

Max. Working Temperature: 150°F / 65°C




Approximate Rinse Cycle Time: 20 Sec.

Inlet & Outlet Connection: DN400 Table E / ISO PN10 / ANSI CL150

Flush Drain Outlet Connection: 2" BSPT Female
Main Drain Header: DN50 2" Nominal Bore

Approximate Weight: Empty ----- 840 lbs / 381 kg
Full of Water --- 1713 lbs / 777 kg

MOTOR DATA	
0.25 kW	rpm1405/36
50 Hz	V230/400

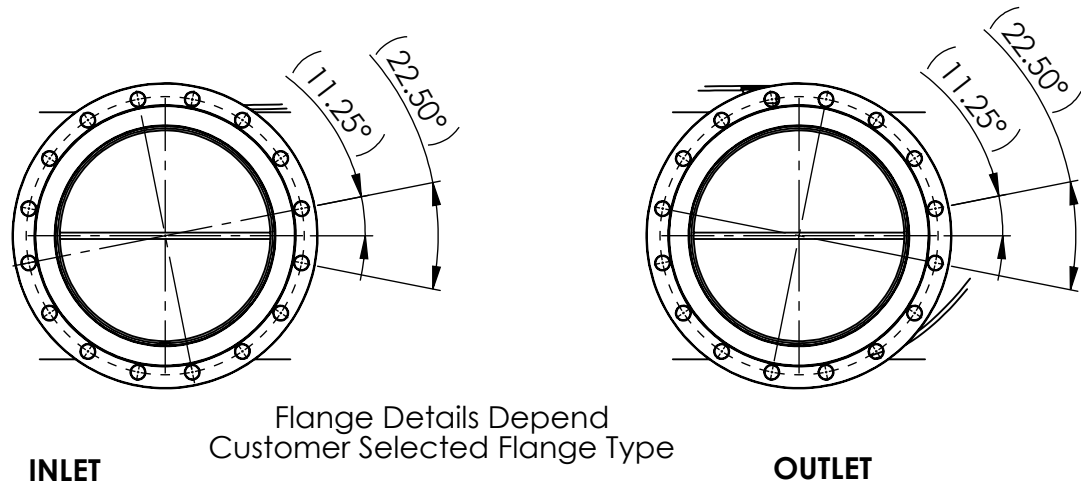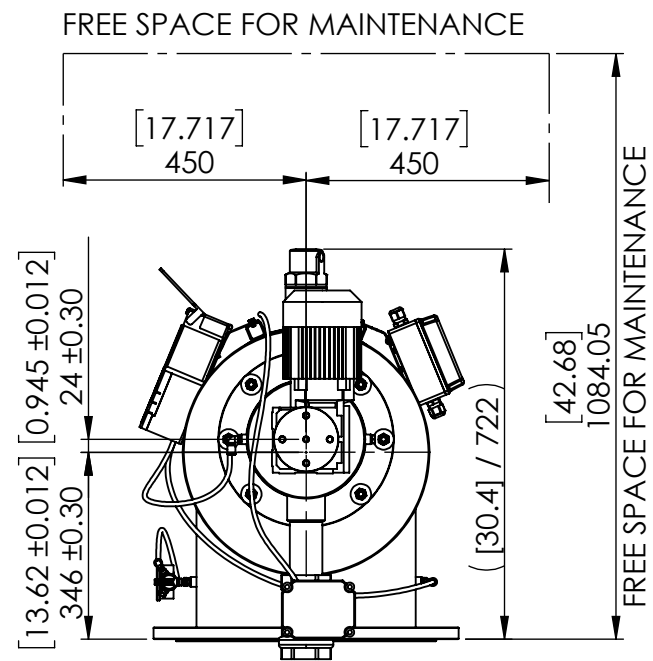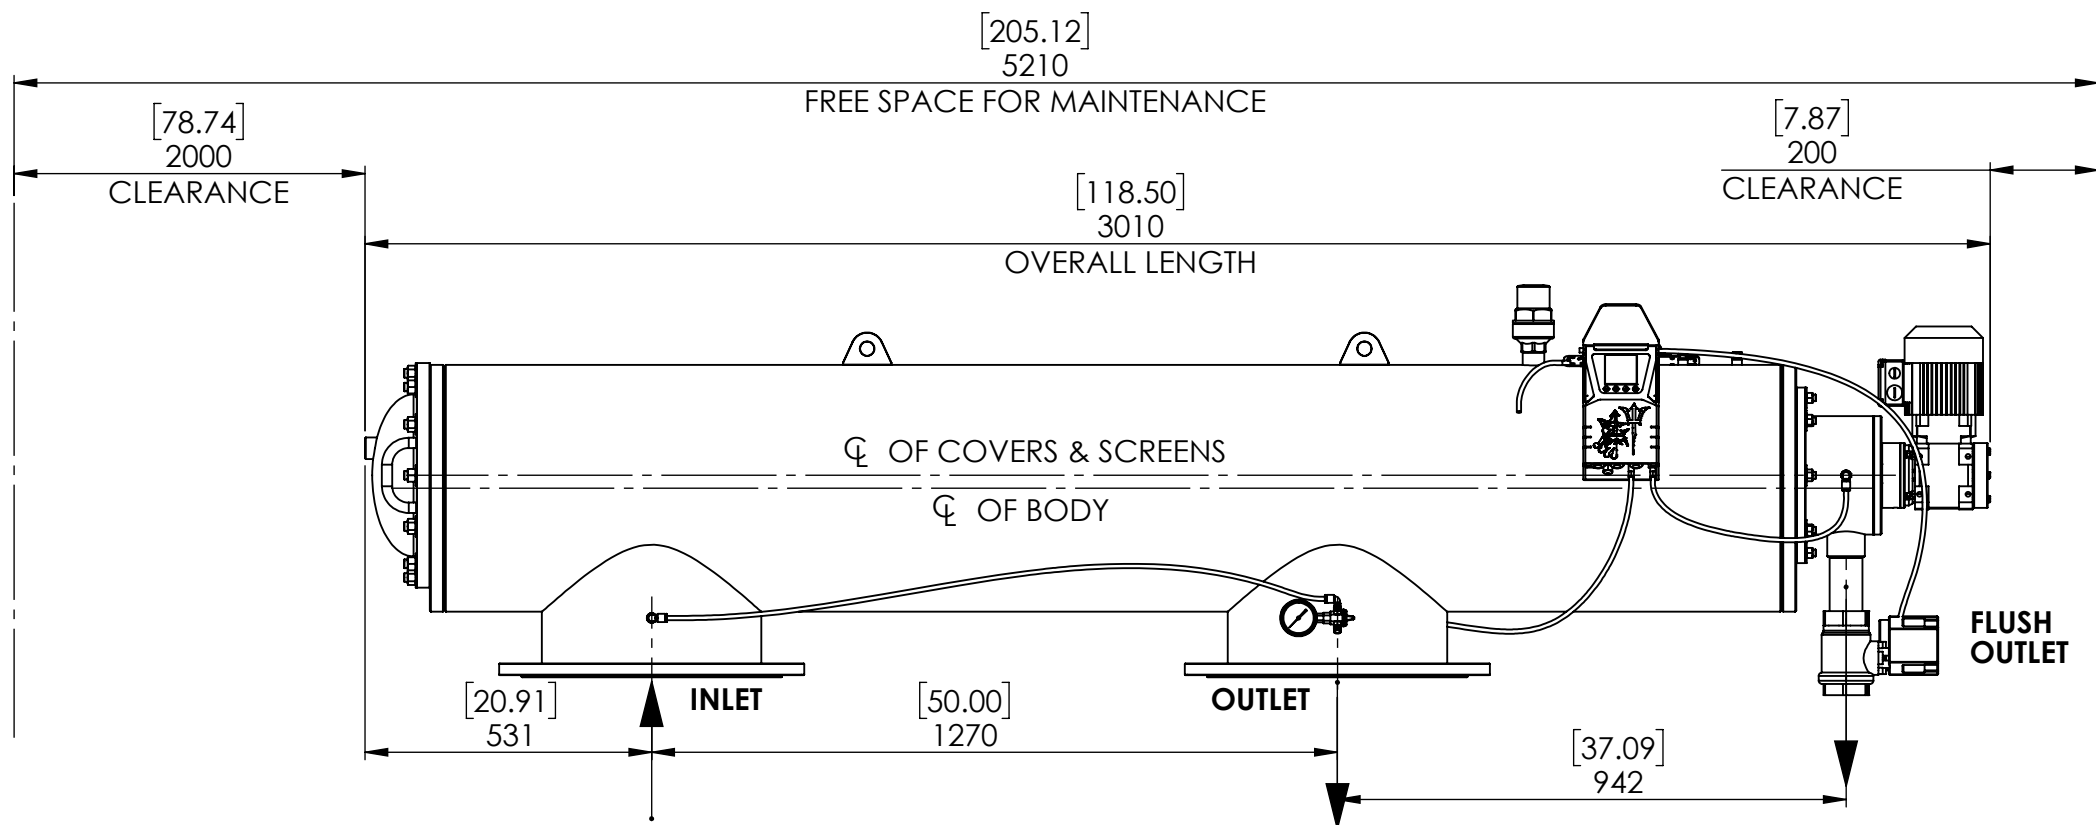


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FILTAWORX PTY. LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FILTAWORX PTY. LTD. IS PROHIBITED.

DIMENSIONS ARE IN mm

MATERIAL
AS SPECIFIED

FINISH

TOL. MACHINING	±0.25
TOL. ANGULAR	±0.25°



FILTAWORX

TITLE
FED400 WATER FILTER
ELECTRIC DRIVE AUTO SELF CLEANING
DN400 TABLE E / ISO PN10 / ANSI CL150

SIZE A3	DWG. NO. GA-05357	REV. 0
------------	----------------------	-----------

SCALE: 1:14.	WEIGHT: 295584.31 kg.	SHEET: 1 OF 1
--------------	-----------------------	---------------