


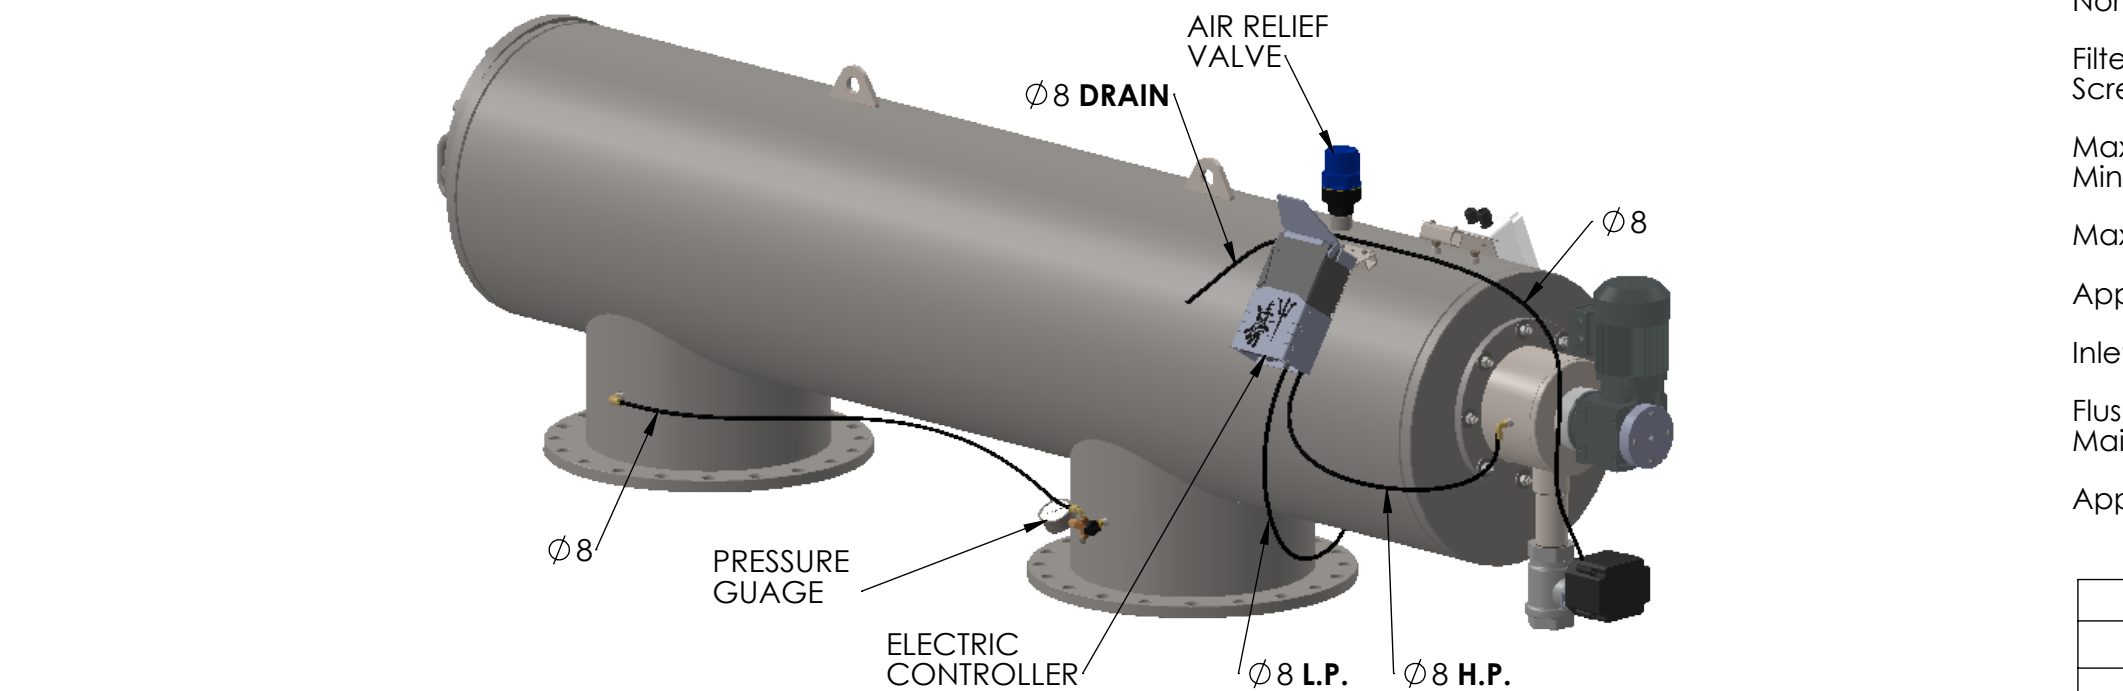

TECHNICAL DATA:

Norminal Flow Rate: 6164 GPM / 1400 cubic m/hr at 2m Head Loss

Filter Area: 2472.25 sq in / 15950 sq cm
Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 150psi / 10 bar
Min. Upstream Line Pressure Required During Rinse Cycle: 15 psi / 1 bar

Max. Working Temperature: 150°F / 65°C





Approximate Rinse Cycle Time: 20 Sec.

Inlet & Outlet Connection: DN450 Table E / ISO PN10 / ANSI CL150

Flush Drain Outlet Connection: 2" BSPT Female
Main Drain Header: DN50 2" Nominal Bore

Approximate Weight: Empty ----- 1004 lbs / 455 kg
Full of Water --- 1841 lbs / 835 kg

MOTOR DATA	
0.25 kW	rpm1405/36
50 Hz	V230/400

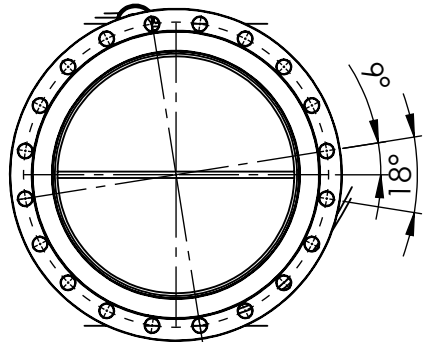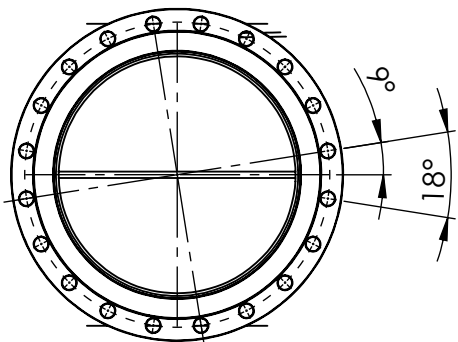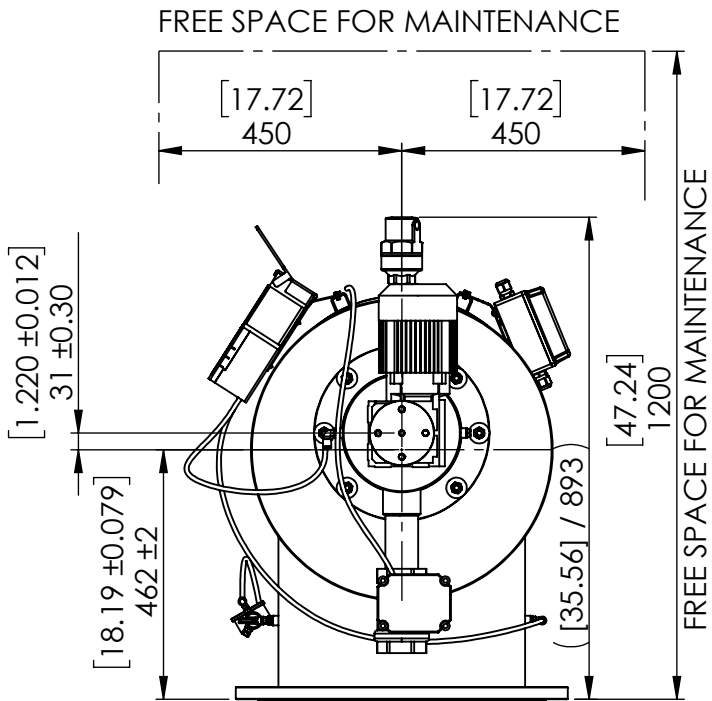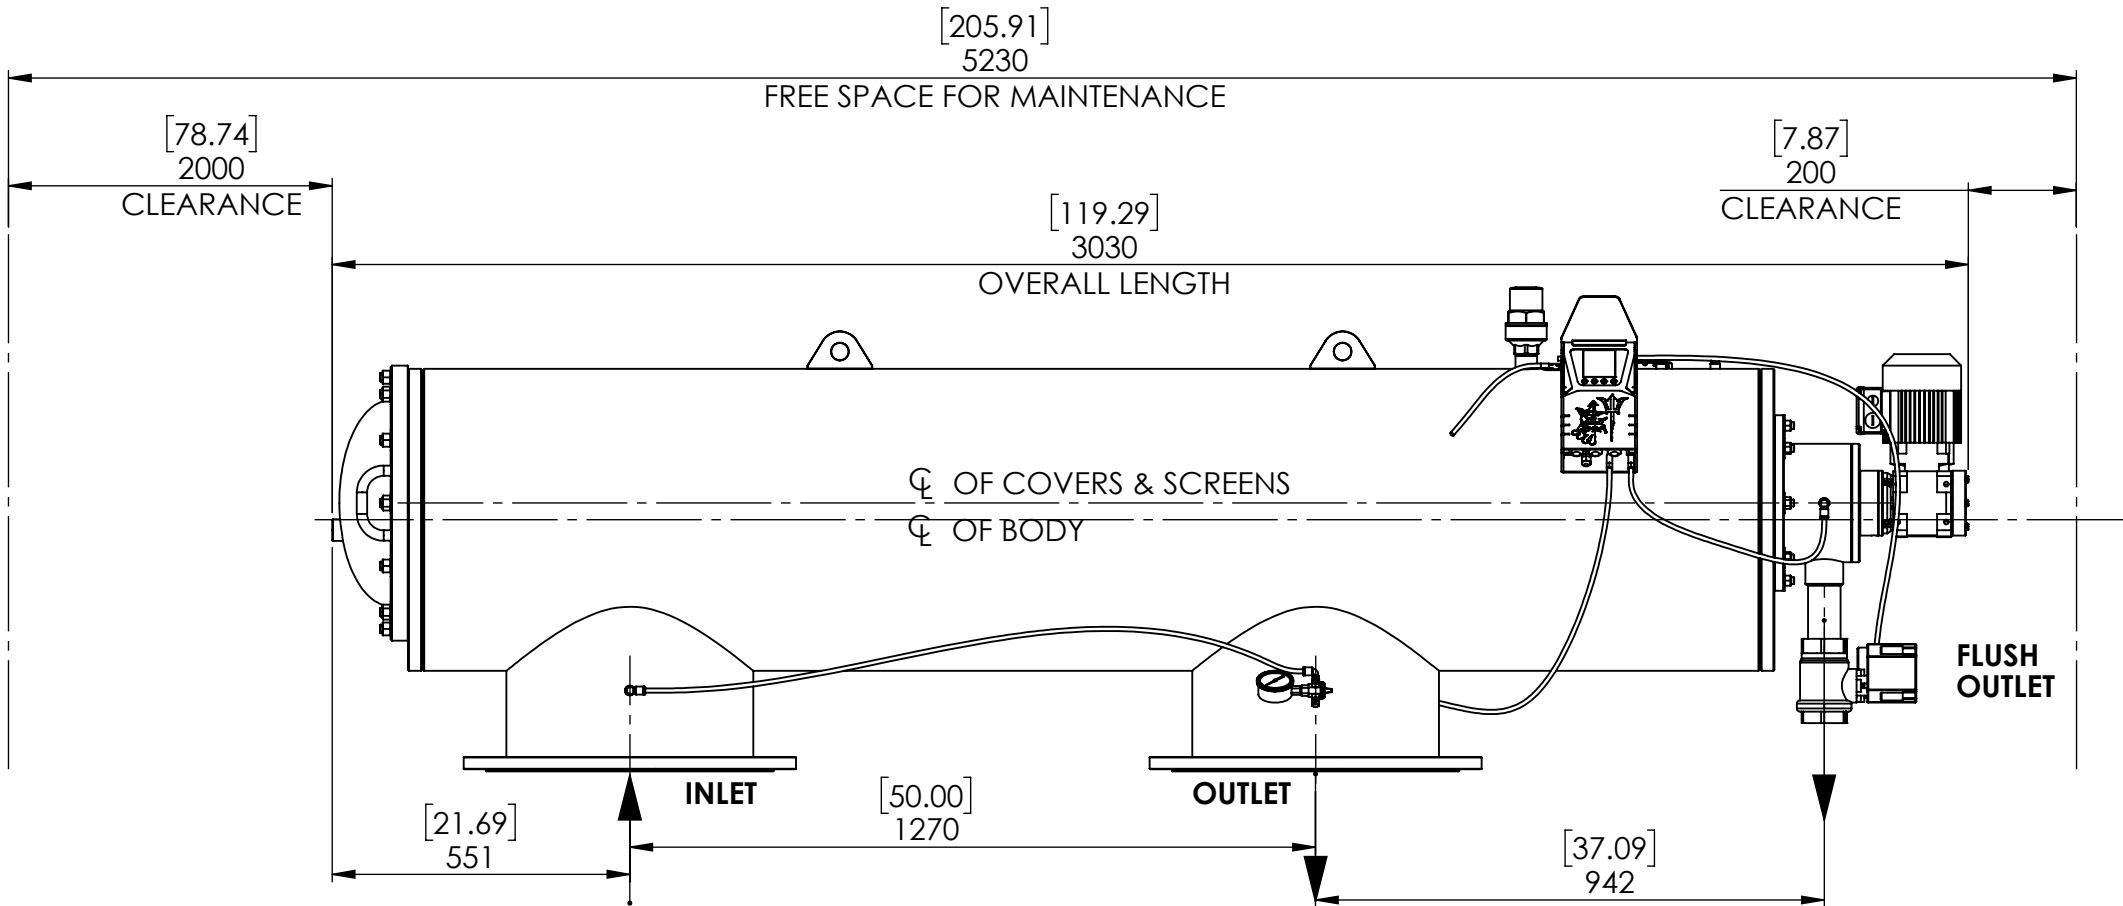

Flange Details Depend
Customer Selected Flange Type

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FILTAWORX PTY. LTD. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FILTAWORX PTY.
LTD. IS PROHIBITED.


DIMENSIONS ARE IN mm

MATERIAL

AS SPECIFIED

FINISH

TOL. MACHINING	±0.25
TOL. ANGULAR	±0.25°



FILTAWORX

TITLE
FED450 WATER FILTER
ELECTRIC DRIVE AUTO SELF CLEANING
DN450 TABLE E / ISO PN10 / ANSI CL150

SIZE A3	DWG. NO. GA-05557	REV. 0
------------	----------------------	-----------

SCALE: 1:14. WEIGHT: 398.34 kg. SHEET: 1 OF 1