


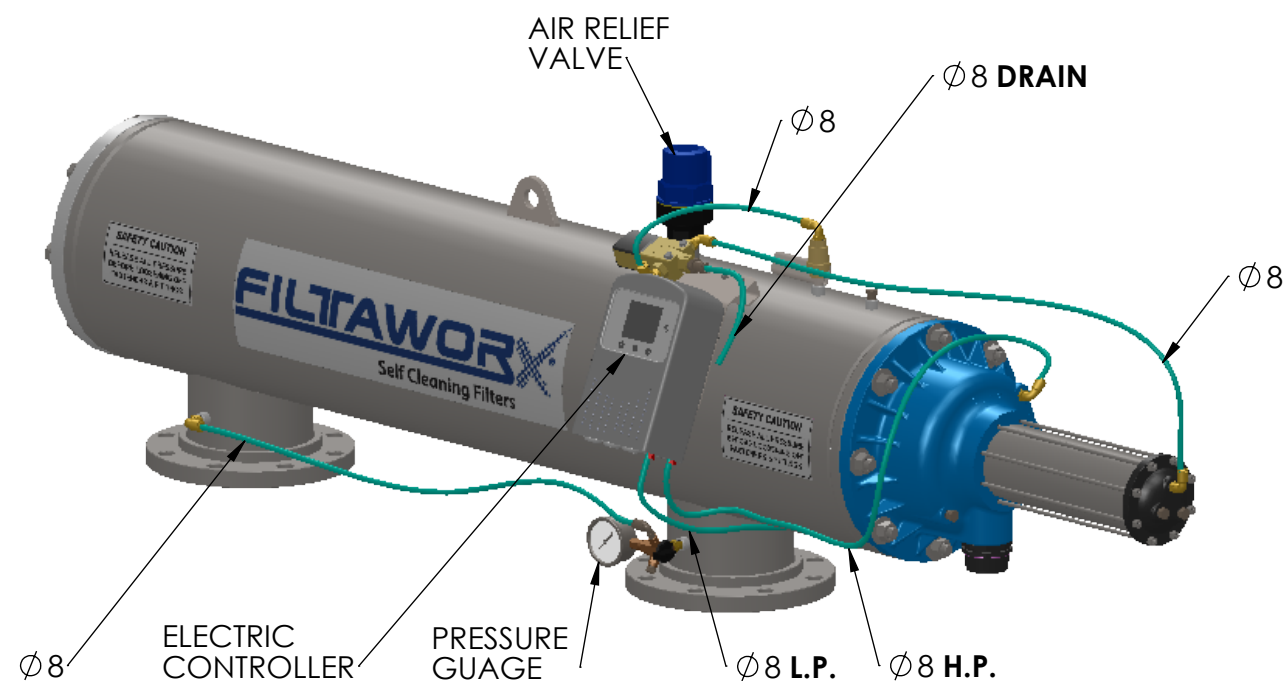

TECHNICAL DATA:

Normal Flow Rate: 550 GPM / 150 cubic m/hr at 2m Head Loss

Filter Area: 869 sq in / 5603 sq cm
Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 150psi / 10 bar
Min. Upstream Line Pressure Required During Rinse Cycle: 30 psi / 2 bar




Max. Working Temperature: 150°F / 65°C

Approximate Rinse Cycle Time: 15 - 17 Sec.


Inlet & Outlet Connection: DN150 Table E / ISO PN10 / ANSI CL150

Flush Drain Outlet Connection: 2" BSPT Male
Main Drain Header: DN50 2" Nominal Bore

Approximate Weight: Empty ----- 232 lbs / 105 kg
Full of Water --- 856 lbs / 388 kg

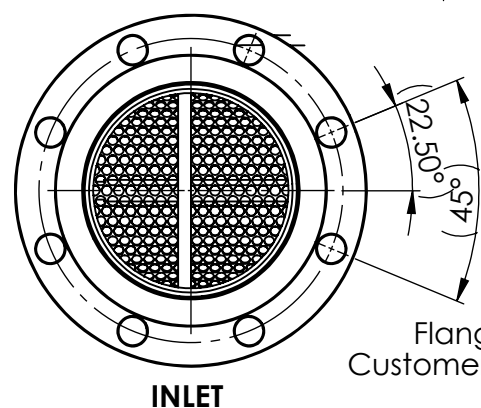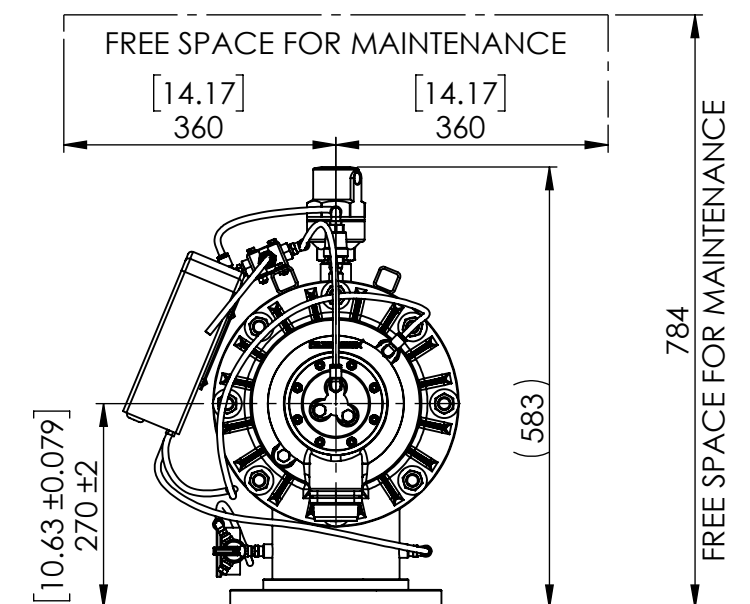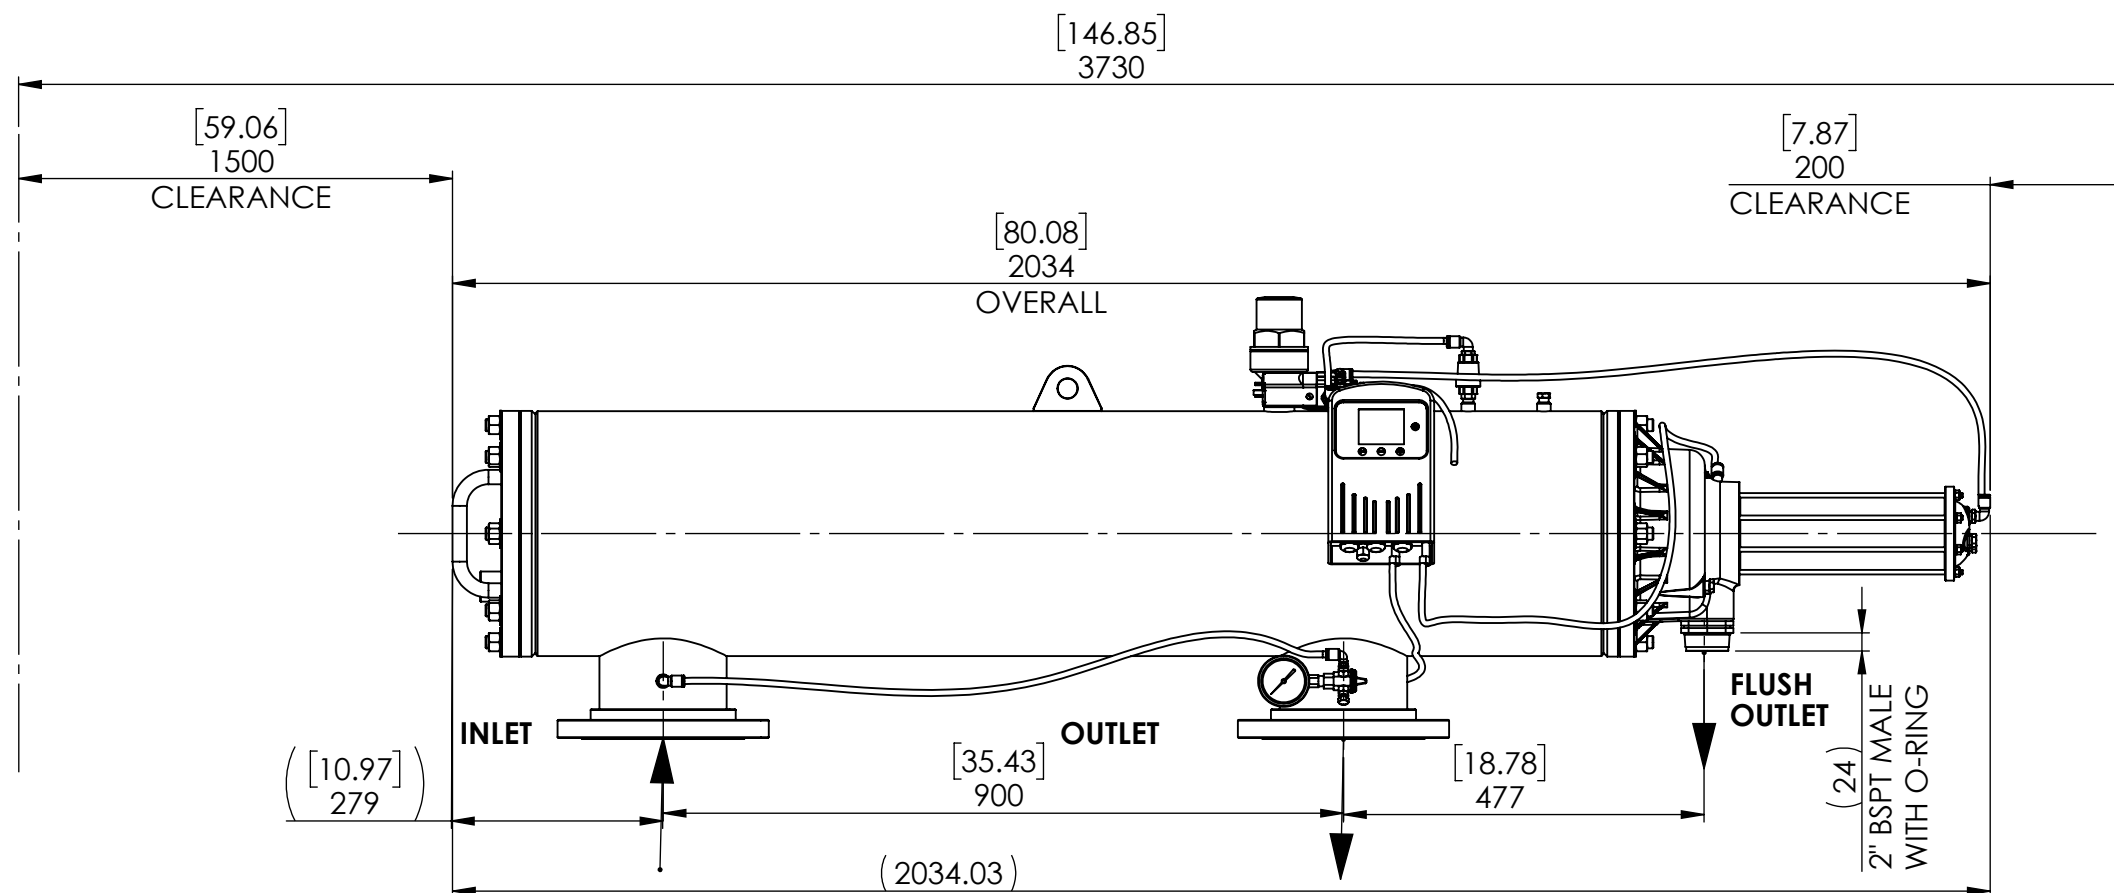

Flange Details Depend
Customer Selected Flange Type

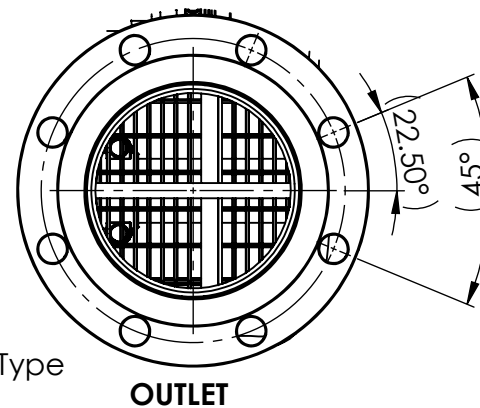


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FILTAWORX PTY. LTD. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FILTAWORX PTY.
LTD. IS PROHIBITED.

DIMENSIONS ARE IN [inches]/mm

MATERIAL
STAINLESS STEEL BODY
GLASS REINFORCED NYLON LID

FINISH

TOL. MACHINING	±0.25
TOL. ANGULAR	±0.25°





FW150WATER FILTER
AUTOMATIC SELF CLEANING
DN150 TABLE E / ISO PN10 / ANSI CL150

SIZE A3	DWG. NO. GA-04608-E	REV. 0
------------	------------------------	-----------

SCALE: 1:10. WEIGHT: SEE TECHNICAL DATA SHEET: 1 OF 1