


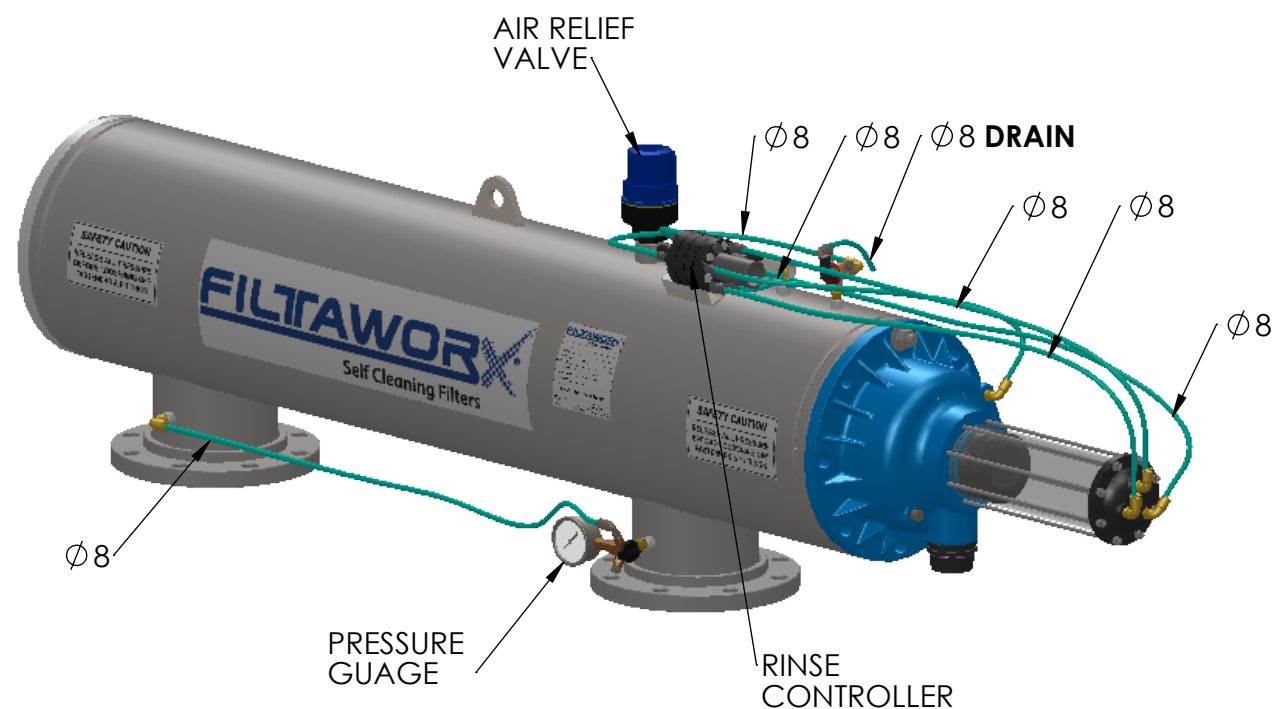

TECHNICAL DATA:

Normal Flow Rate: 793 GPM / 180 cubic m/hr at 2m Head Loss

Filter Area: 1257.83 sq in / 8115 sq cm
Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 150psi / 10 bar
Min. Upstream Line Pressure Required During Rinse Cycle: 30 psi / 2 bar




Max. Working Temperature: 150°F / 65°C

Approximate Rinse Cycle Time: 15 - 17 Sec.

Inlet & Outlet Connection: DN150 Table E / ISO PN10 / ANSI CL150

Flush Drain Outlet Connection: 2" BSPT Male
Main Drain Header: DN50 2" Nominal Bore

Approximate Weight: Empty ----- 232 lbs / 105 kg
Full of Water --- 856 lbs / 388 kg

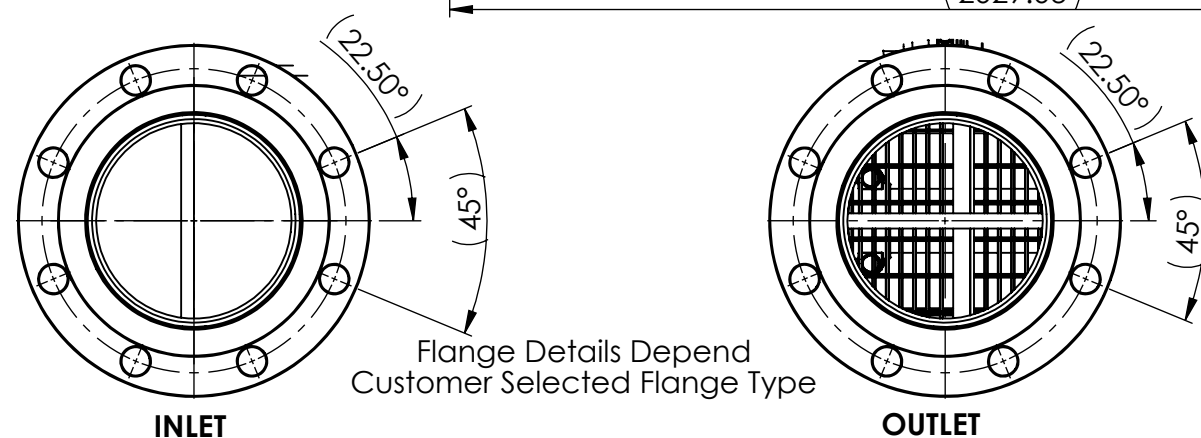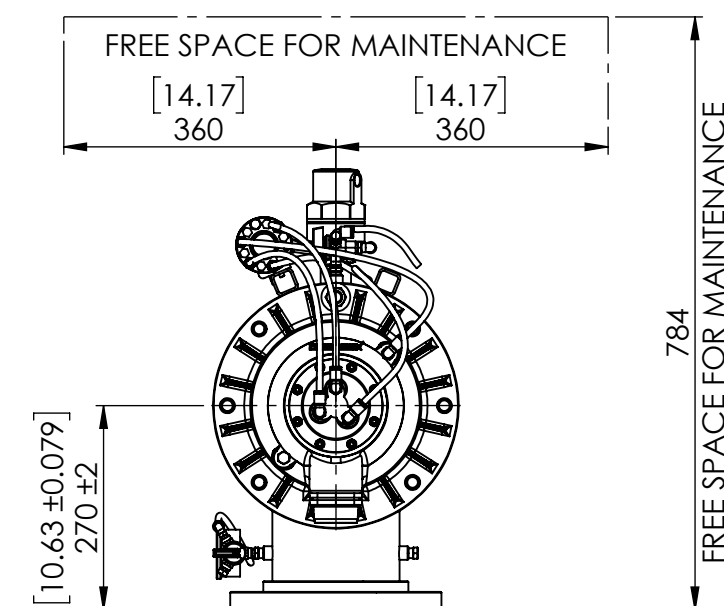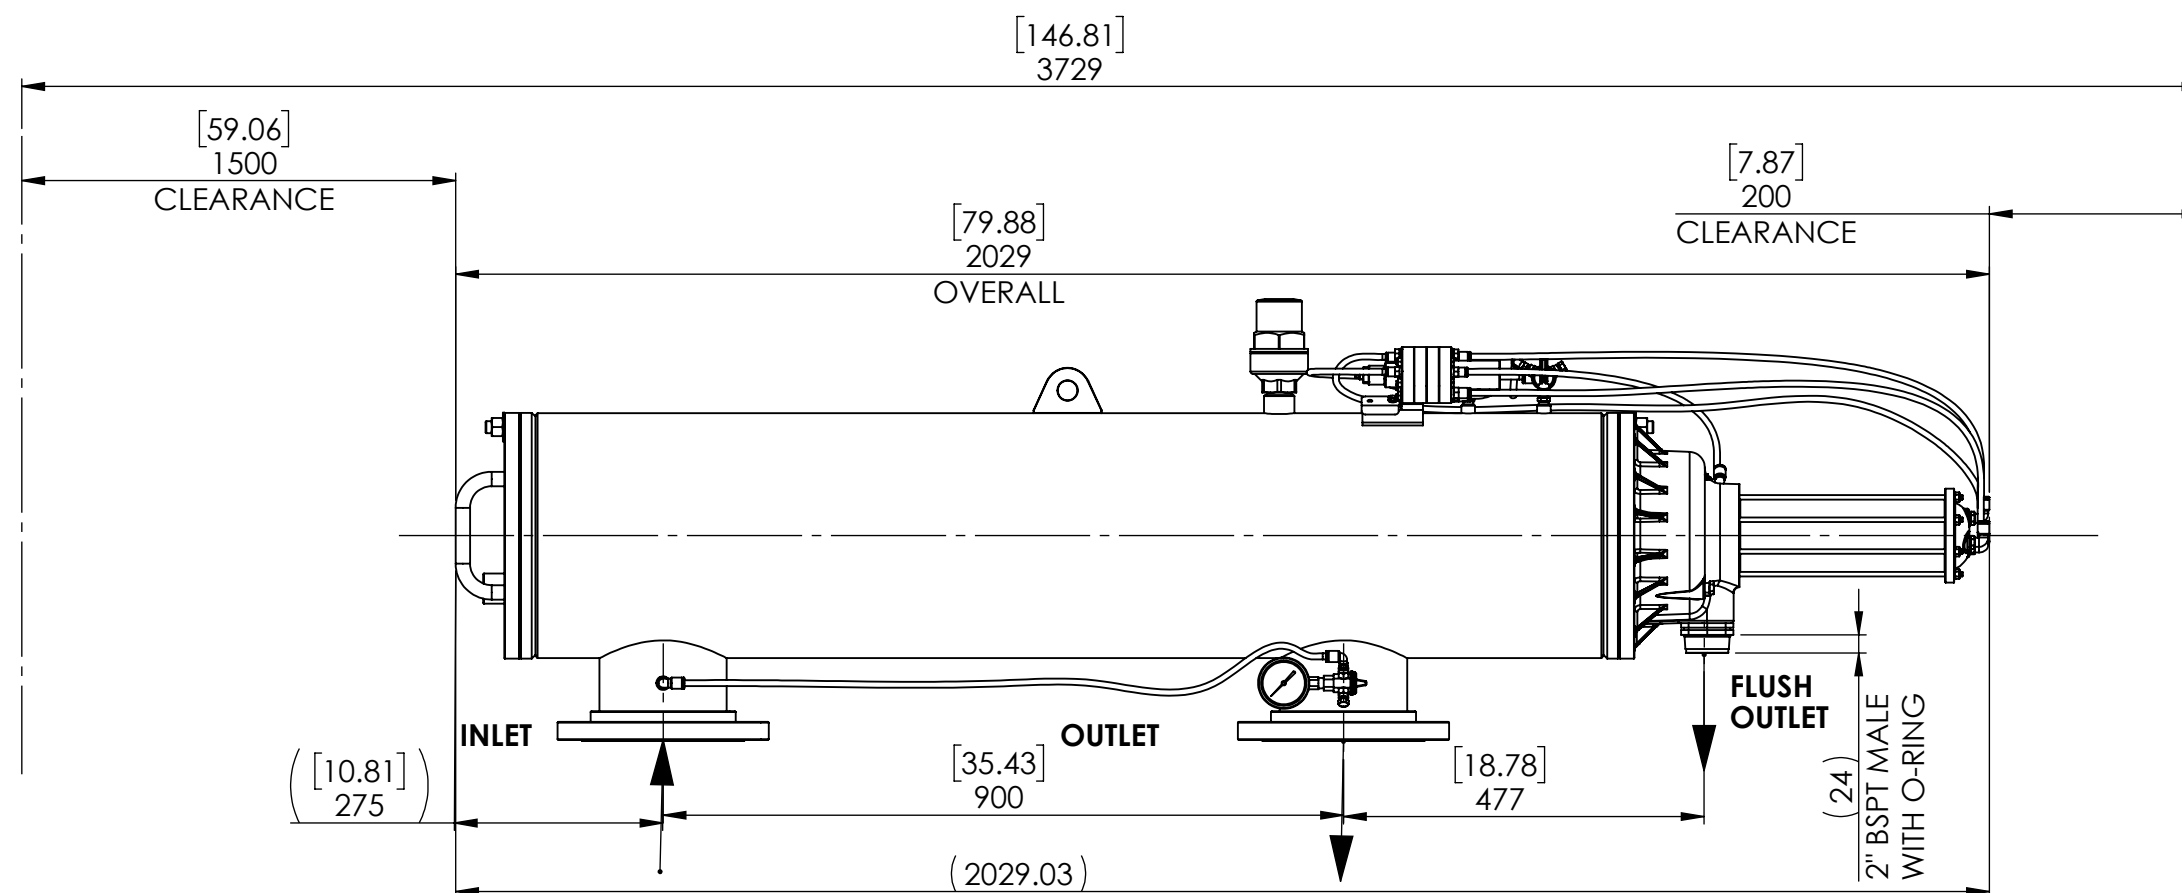


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FILTAWORX PTY. LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FILTAWORX PTY. LTD. IS PROHIBITED.

DIMENSIONS ARE IN [inches]/mm

MATERIAL
STAINLESS STEEL BODY
GLASS REINFORCED NYLON LID

FINISH

TOL. MACHINING ±0.25
TOL. ANGULAR ±0.25°



FILTAWORX

TITLE
FW150WATER FILTER
AUTOMATIC SELF CLEANING
DN150 TABLE E / ISO PN10 / ANSI CL150

SIZE A3 DWG. NO. GA-04608-H REV. 0

SCALE: 1:10. WEIGHT: SEE TECHNICAL DATA SHEET: 1 OF 1