


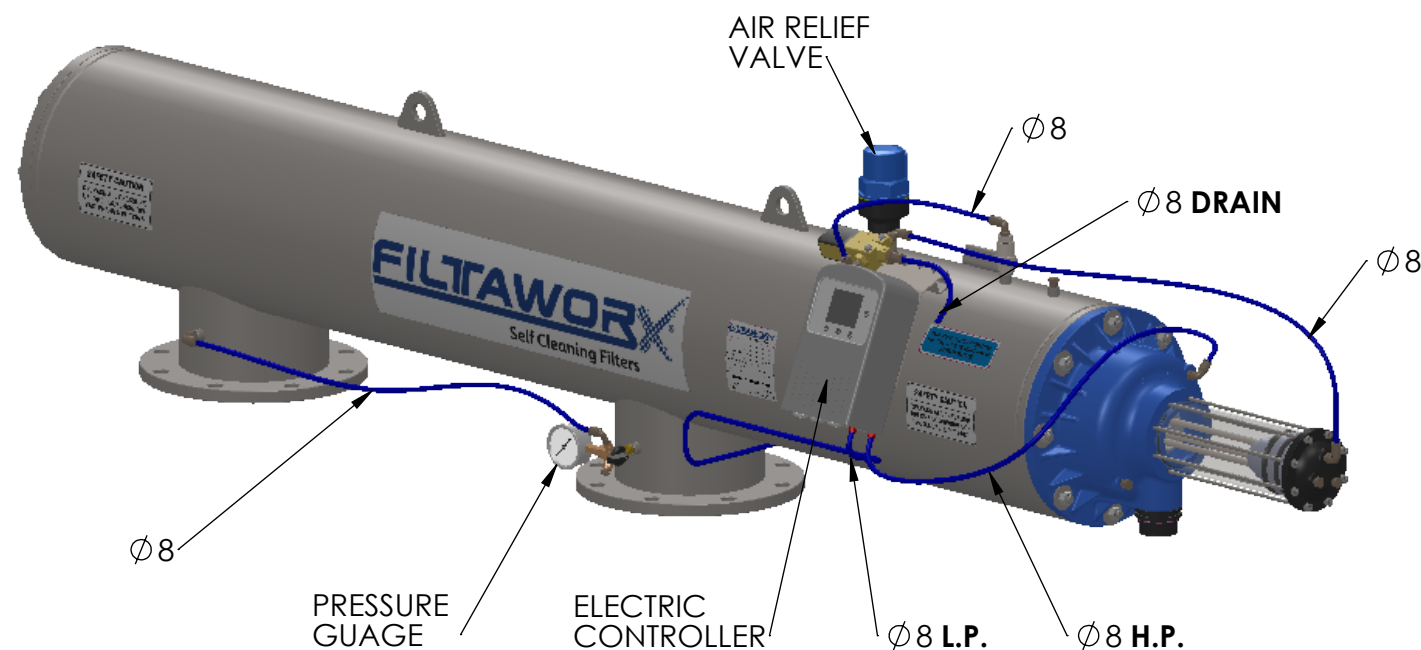

# **TECHNICAL DATA:**

Normal Flow Rate: 1409 GPM / 320 cubic m/hr at 2m Head Loss

Filter Area: 1257.83 sq in / 8115 sq cm

Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 150psi / 10 bar

Min. Upstream Line Pressure Required During Rinse Cycle: 30 psi / 2 bar

Max. Working Temperature: 150°F / 65°C

Approximate Rinse Cycle Time: 15 - 17 Sec.




Inlet & Outlet Connection: DN200 Table E / ISO PN10 / ANSI CL150

Flush Drain Outlet Connection: 2" BSPT Male

Main Drain Header: DN50 2" Nominal Bore


Approximate Weight: Empty ----- 287 lbs / 130 kg

Full of Water --- 856 lbs / 388 kg

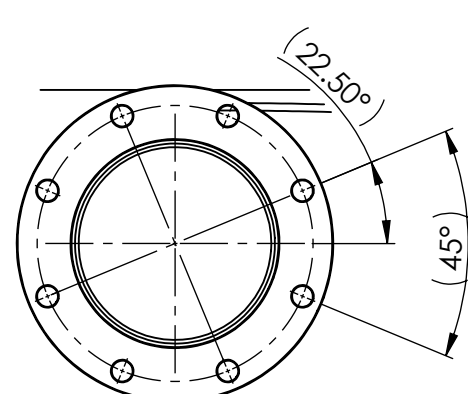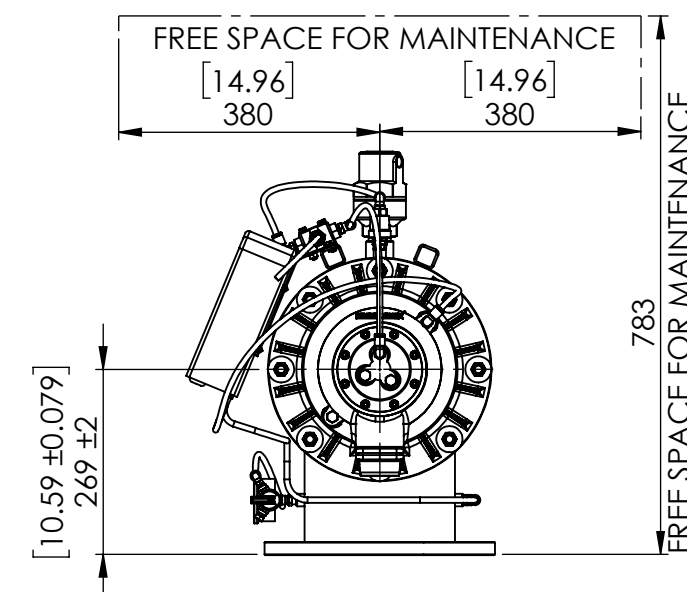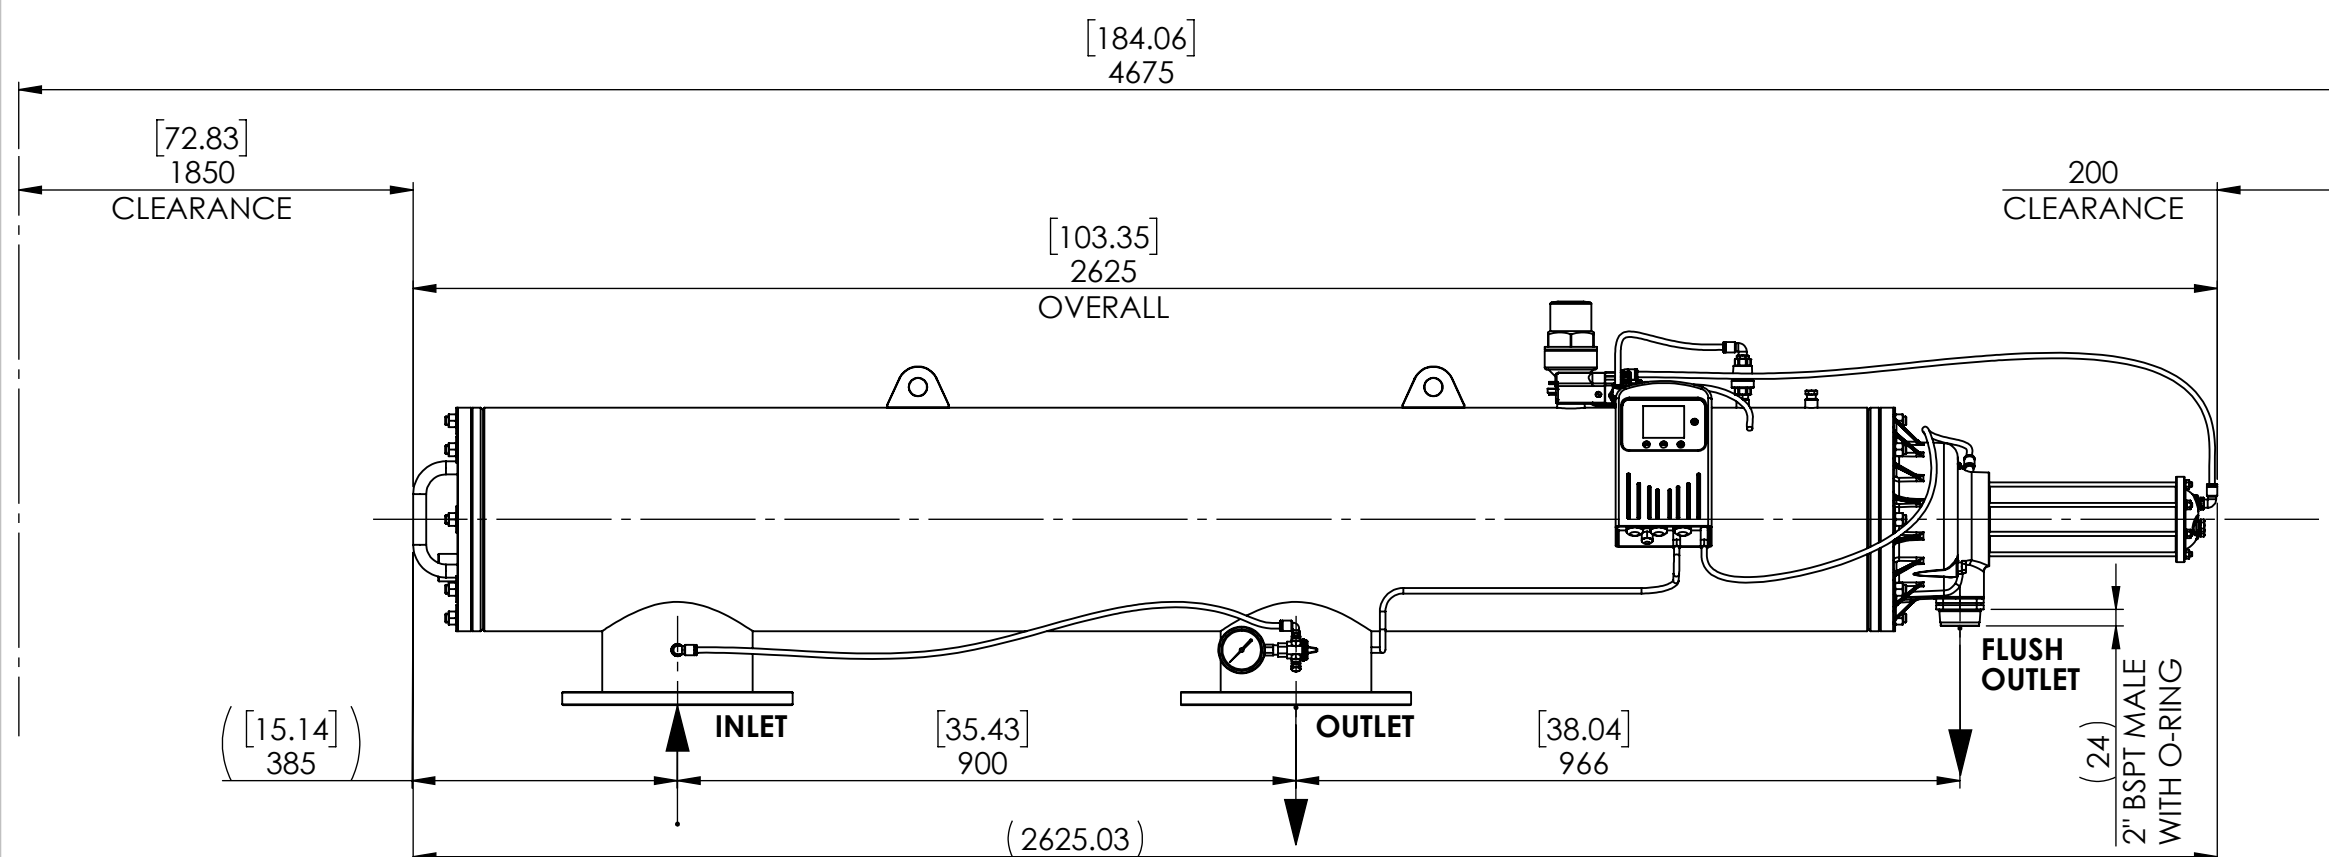

**INLET**

Flange Details Depend  
Customer Selected Flange Type

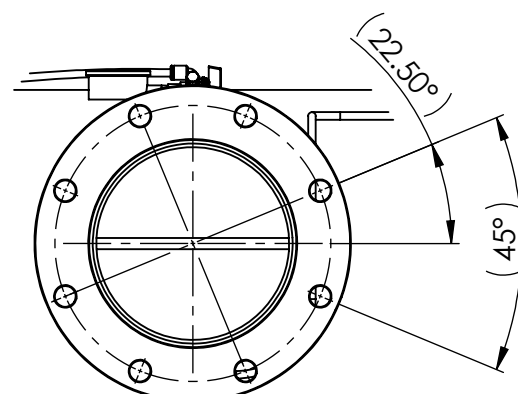

**OUTLET**

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
FILTAWORX PTY. LTD. ANY REPRODUCTION  
IN PART OR AS A WHOLE WITHOUT THE  
WRITTEN PERMISSION OF FILTAWORX PTY.  
LTD. IS PROHIBITED.


DIMENSIONS ARE IN [inches]/mm

MATERIAL  
**STAINLESS STEEL BODY**  
GLASS REINFORCED NYLON LID

FINISH

TOL. MACHINING ±0.25

TOL. ANGULAR ±0.25°



**FILTAWORX**

TITLE

**FW200 WATER FILTER**  
AUTOMATIC SELF CLEANING  
DN200 TABLE E / ISO PN10 / ANSI CL150

SIZE

A3

DWG. NO.

GA-04808-E

REV.

0

SCALE: 1:11.

WEIGHT: SEE TECHNICAL DATA

SHEET: 1 OF 1