


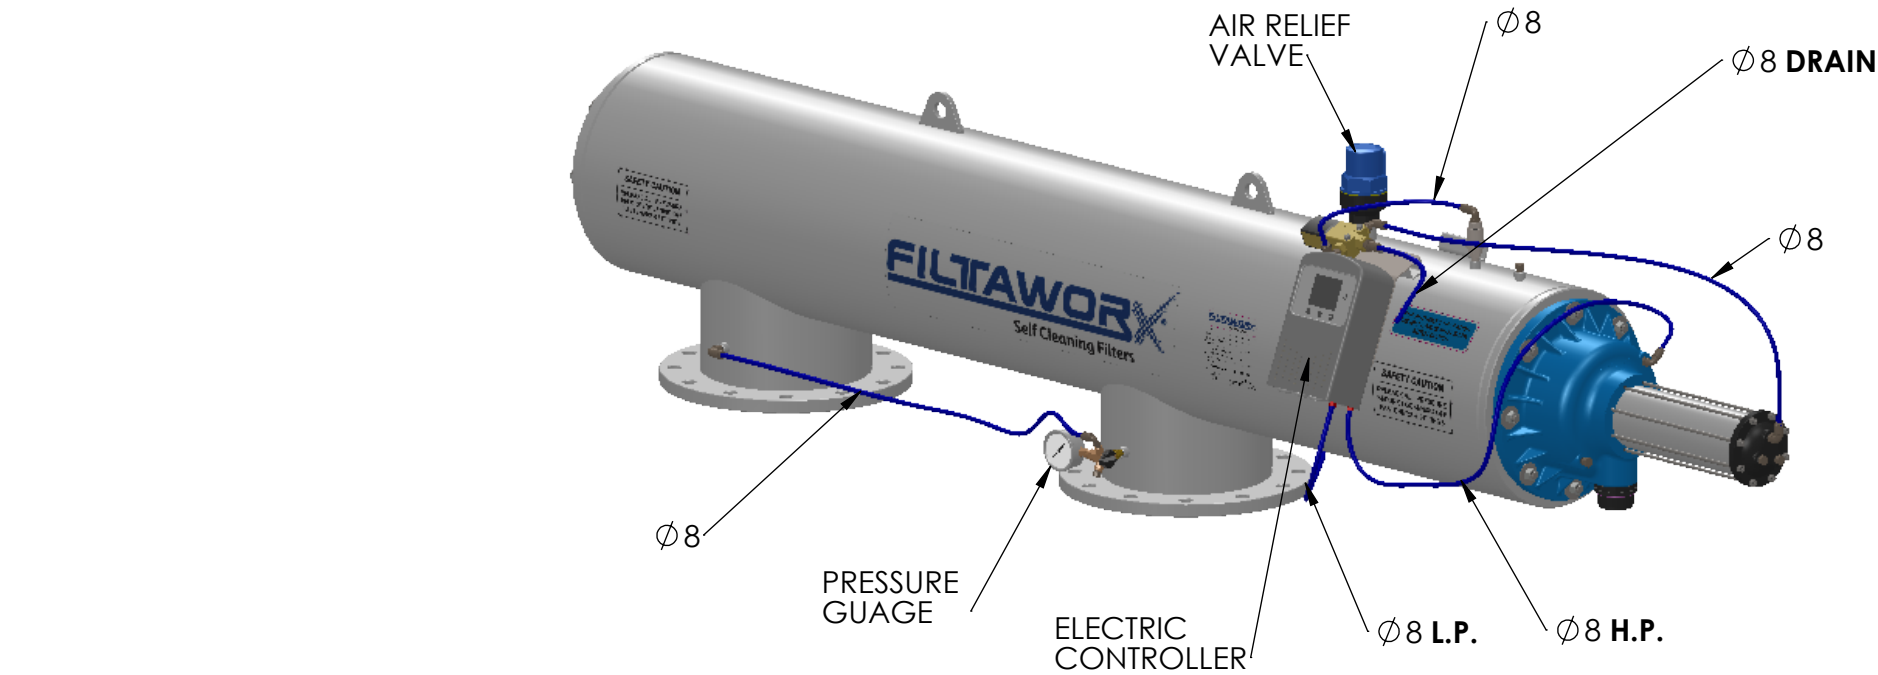

TECHNICAL DATA:

Norminal Flow Rate: 1761.15 GPM / 400 cubic m/hr at 2m Head Loss

Filter Area: 1257.83 sq in / 8115 sq cm
Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 150psi / 10 bar
Min. Upstream Line Pressure Required During Rinse Cycle: 30 psi /2 bar




Max. Working Temperature: 150°F / 65°C

Approximate Rinse Cycle Time: 15 - 17 Sec.

Inlet & Outlet Connection: DN250 Table E / ISO PN10 / ANSI CL150

Flush Drain Outlet Connection: 2" BSPT Male
Main Drain Header: DN50 2" Nominal Bore


Approximate Weight: Empty ----- 371 lbs / 168 kg
Full of Water --- 856 lbs / 388 kg

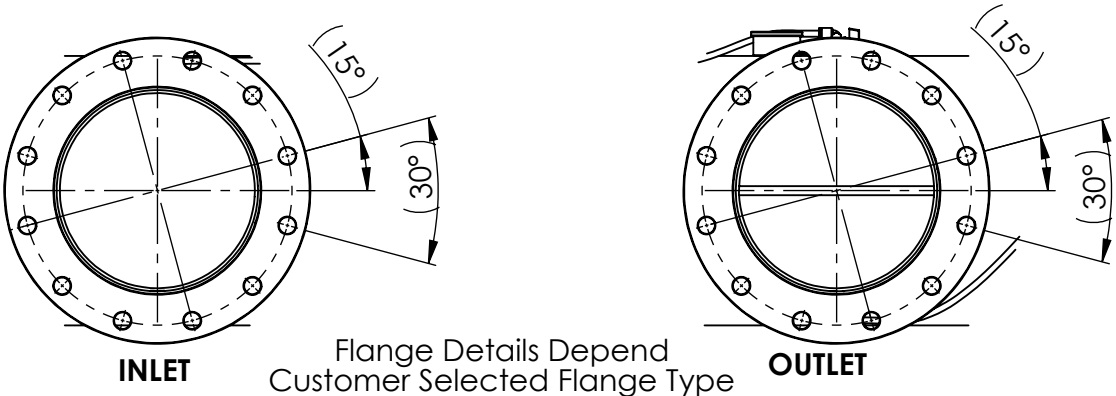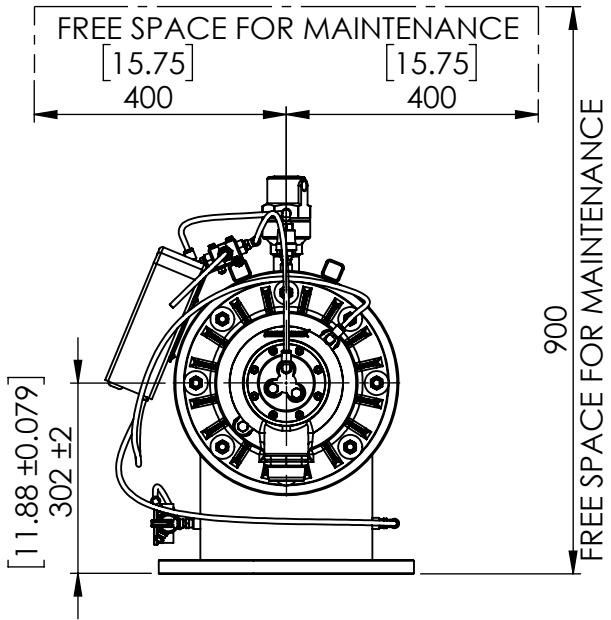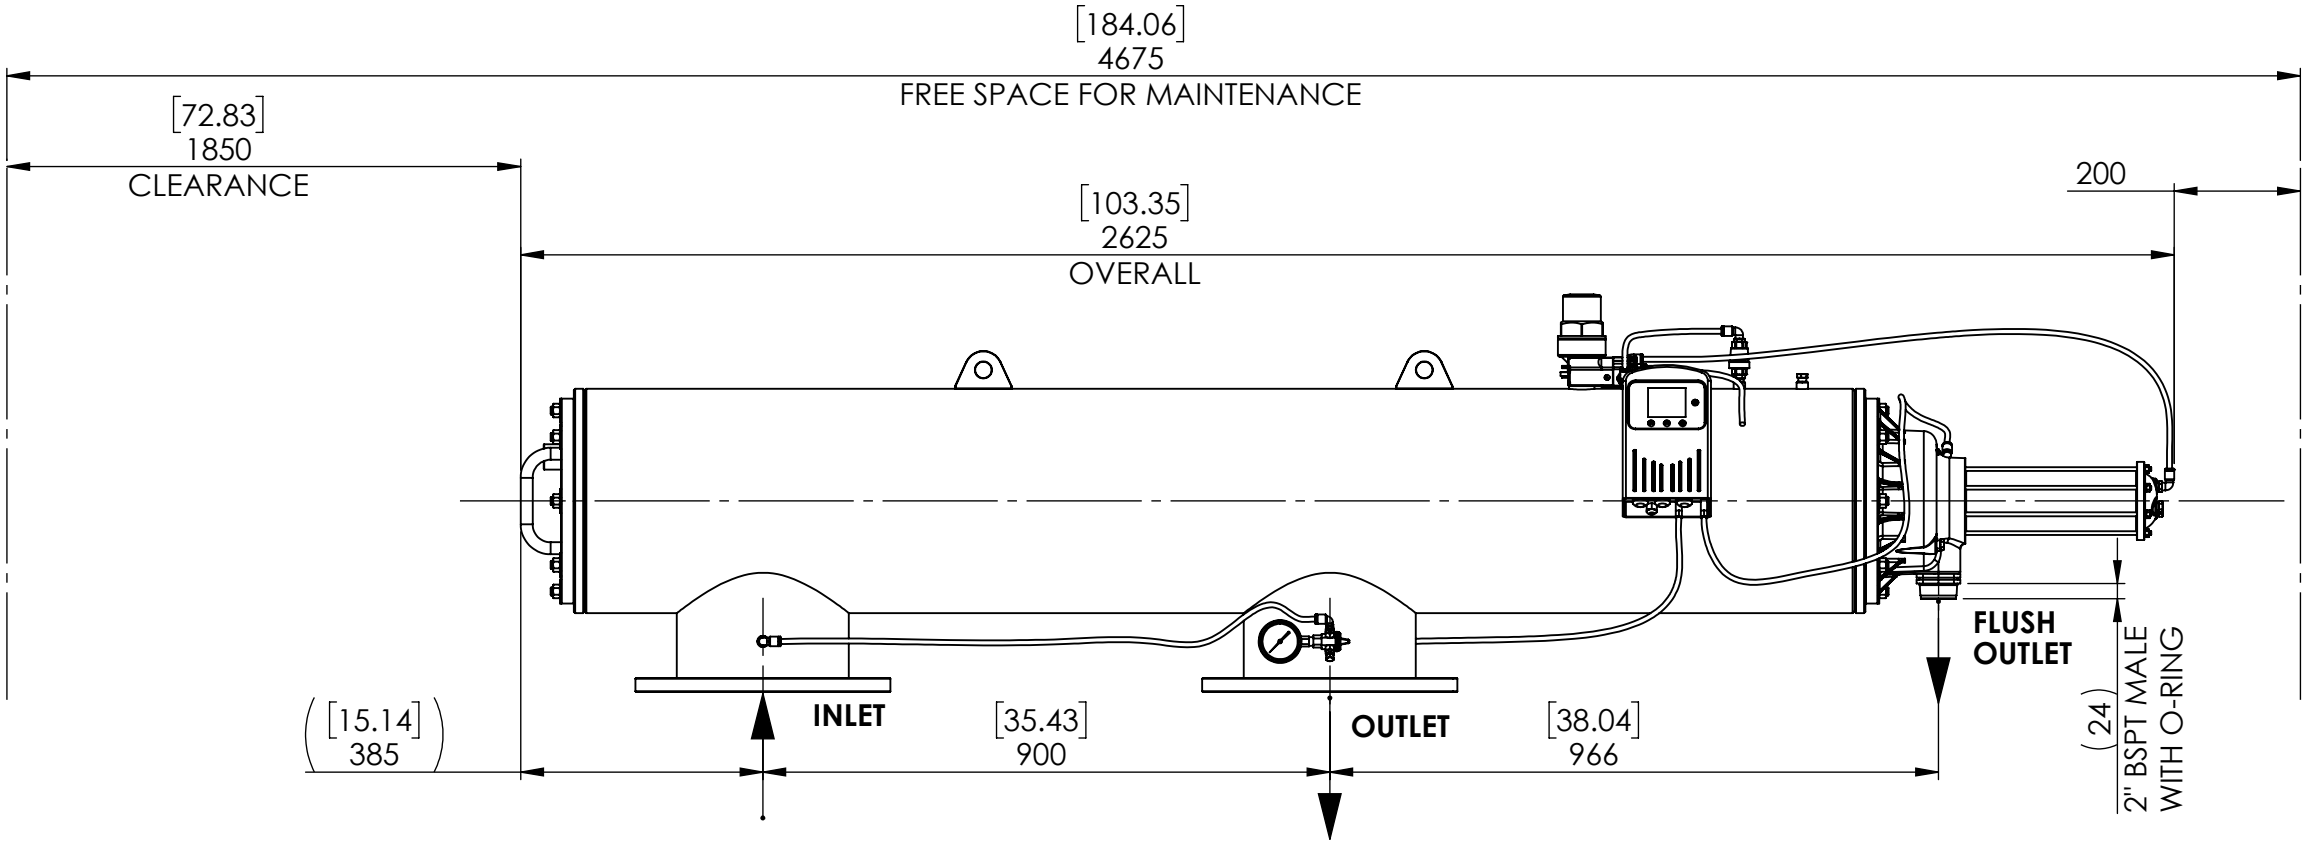

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FILTAWORX PTY. LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FILTAWORX PTY. LTD. IS PROHIBITED.

MATERIAL
STAINLESS STEEL BODY
GLASS REINFORCED NYLON LID

TOL. MACHINING ±0.25
TOL. ANGULAR ±0.25°



TITLE

FW250 WATER FILTER
AUTOMATIC SELF CLEANING
DN250 TABLE E / ISO PN10 / ANSI CL150

SIZE	DWG. NO.	REV.
A3	GA-04908-E	0

SCALE: 1:12.	WEIGHT: SEE TECHNICAL DATA	SHEET: 1 OF 1
--------------	----------------------------	---------------