


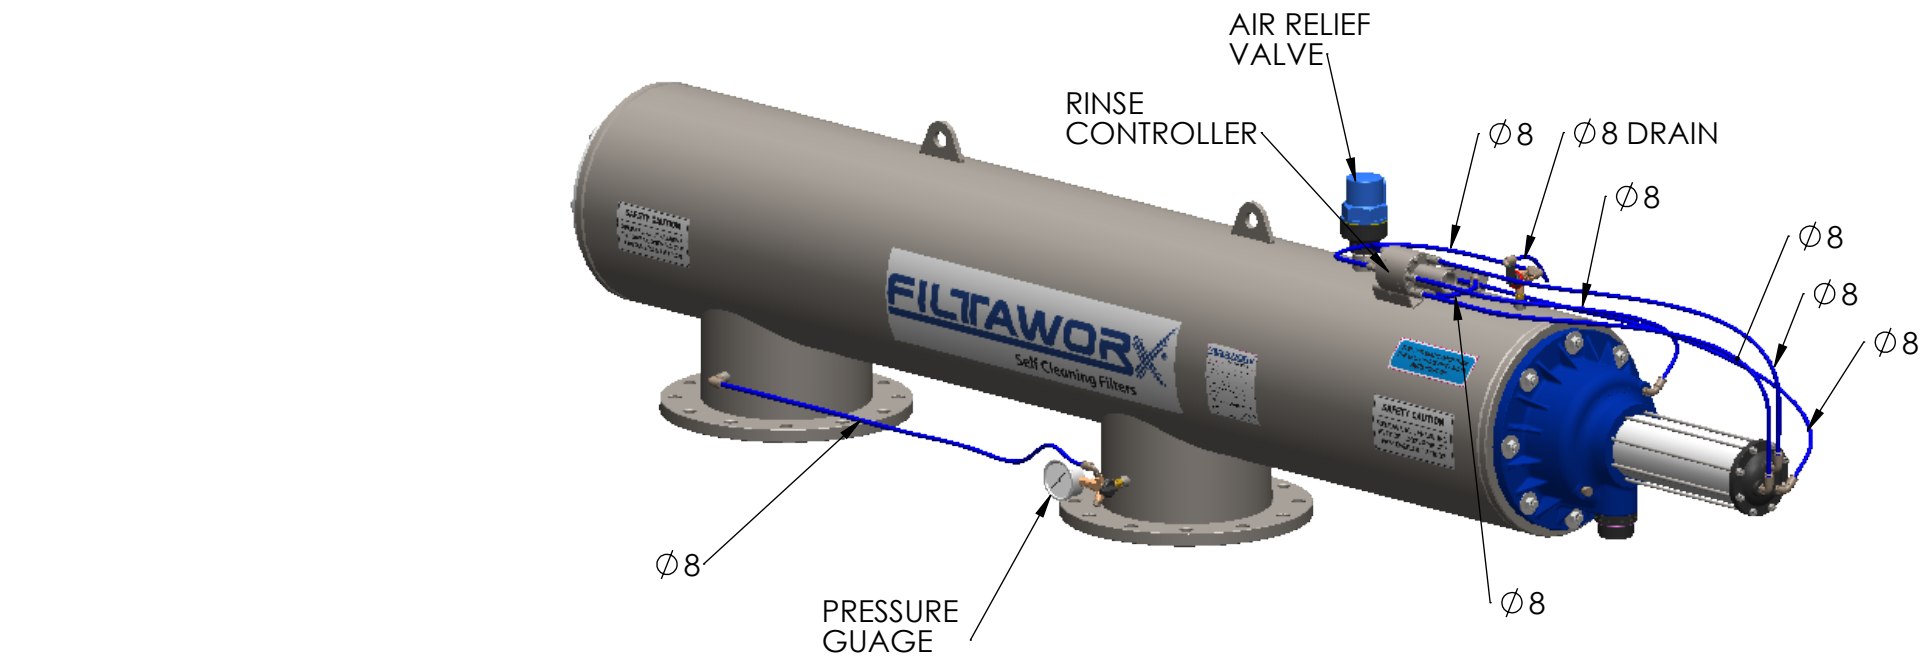

TECHNICAL DATA:

Norminal Flow Rate: 1761.15 GPM / 400 cubic m/hr at 2m Head Loss

Filter Area: 1257.83 sq in / 8115 sq cm
Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 150psi / 10 bar
Min. Upstream Line Pressure Required During Rinse Cycle: 30 psi /2 bar




Max. Working Temperature: 150°F / 65°C

Approximate Rinse Cycle Time: 15 - 17 Sec.

Inlet & Outlet Connection: DN250 Table E / ISO PN10 / ANSI CL150


Flush Drain Outlet Connection: 2" BSPT Male
Main Drain Header: DN50 2" Nominal Bore

Approximate Weight: Empty ----- 371 lbs / 168 kg
Full of Water --- 856 lbs / 388 kg

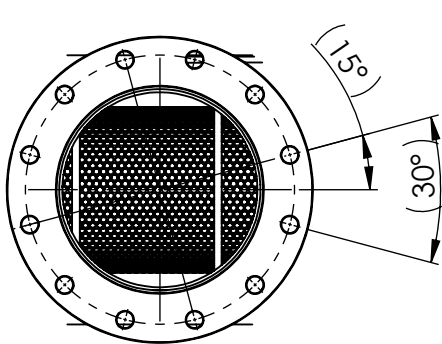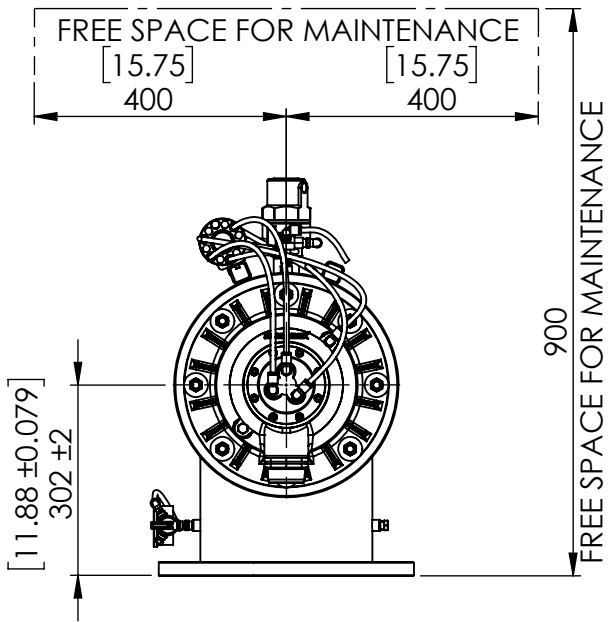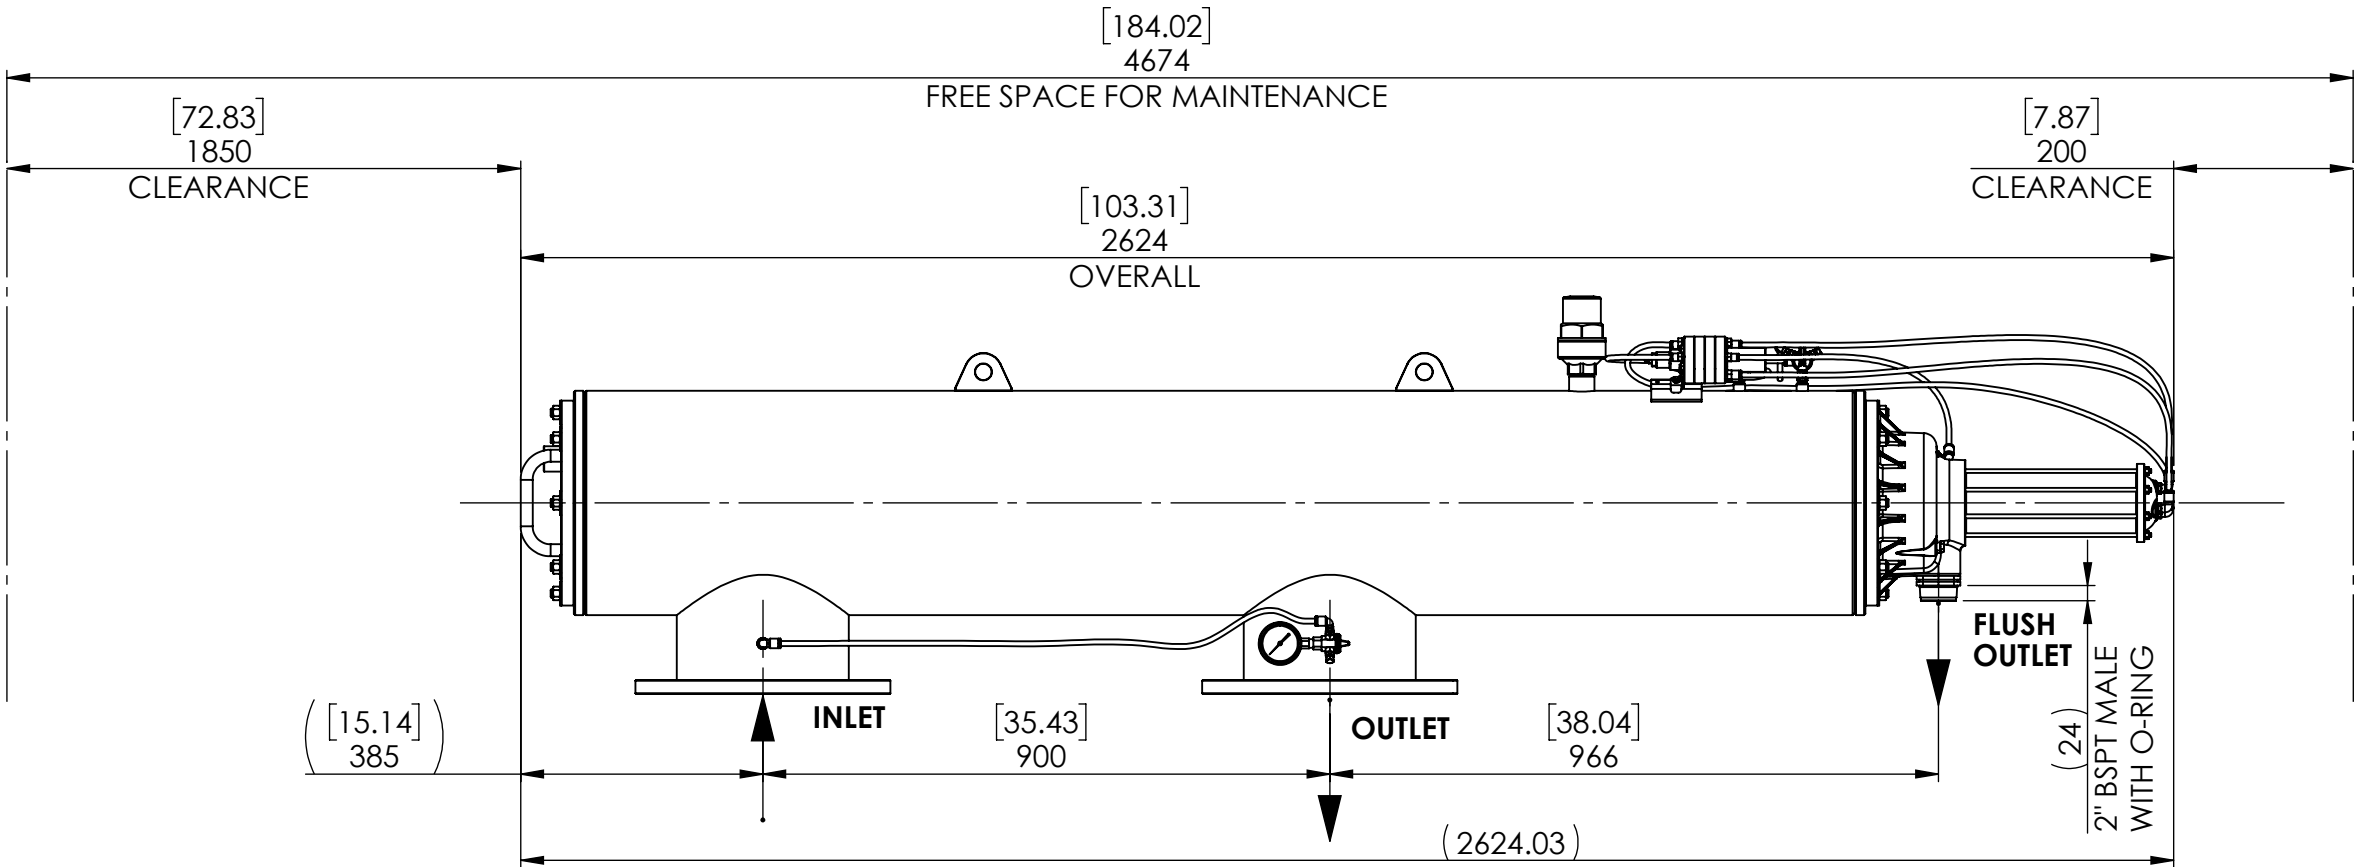

INLET

Flange Details Depend
Customer Selected Flange Type

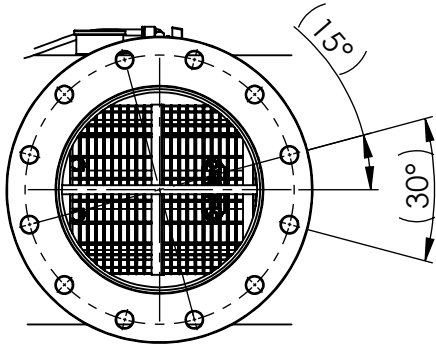

OUTLET


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FILTAWORX PTY. LTD. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FILTAWORX PTY.
LTD. IS PROHIBITED.

DIMENSIONS ARE IN [inches]/mm

MATERIAL
STAINLESS STEEL BODY
GLASS REINFORCED NYLON LID

FINISH

TOL. MACHINING	±0.25
TOL. ANGULAR	±0.25°



FILTAWORX

TITLE
FW250 WATER FILTER
AUTOMATIC SELF CLEANING
DN250 TABLE E / ISO PN10 / ANSI CL150

SIZE A3	DWG. NO. GA-04908-H	REV. 0
------------	------------------------	-----------

SCALE: 1:12. WEIGHT: SEE TECHNICAL DATA SHEET: 1 OF 1