


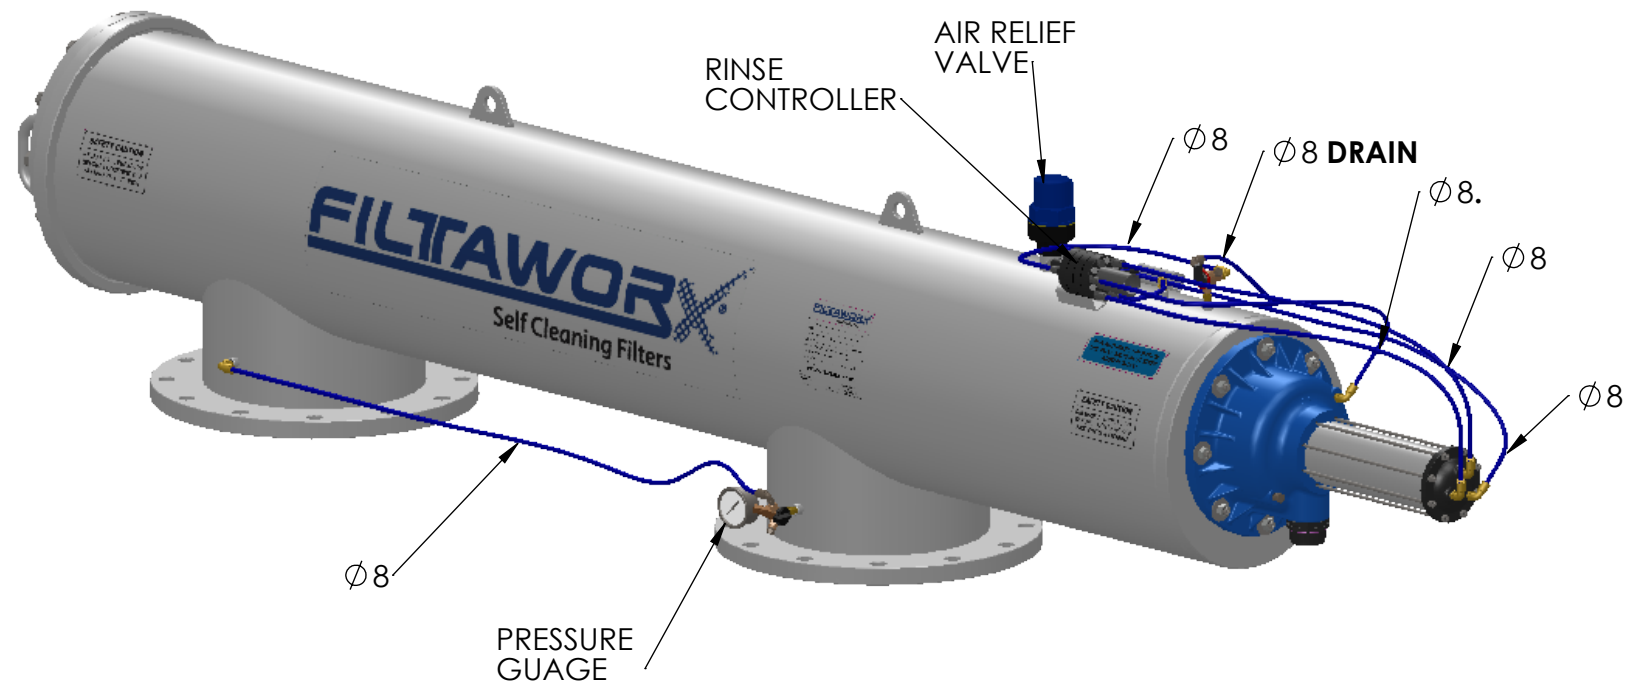

TECHNICAL DATA:

Normal Flow Rate: 3962.58 GPM / 900 cubic m/hr at 2m Head Loss

Filter Area: 1886.35 sq in / 12170 sq cm
Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 150psi / 10 bar
Min. Upstream Line Pressure Required During Rinse Cycle: 30 psi / 2 bar




Max. Working Temperature: 150°F / 65°C

Approximate Rinse Cycle Time: 15 - 17 Sec.

Inlet & Outlet Connection: DN350 Table E / ISO PN10 / ANSI CL150


Flush Drain Outlet Connection: 2" BSPT Male
Main Drain Header: DN50 2" Nominal Bore

Approximate Weight: Empty ----- 628.31 lbs / 285 kg
Full of Water --- 1311.75 lbs / 595 kg

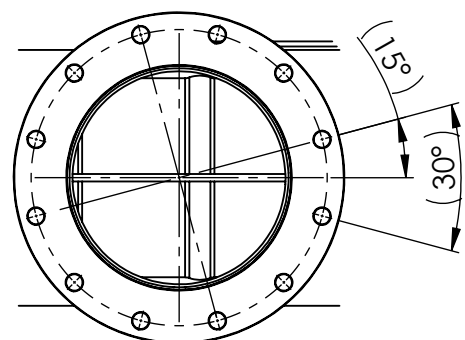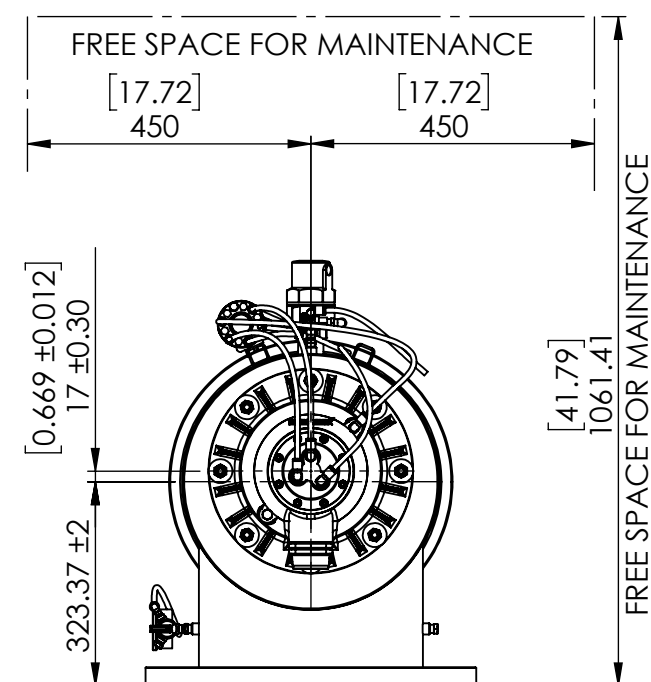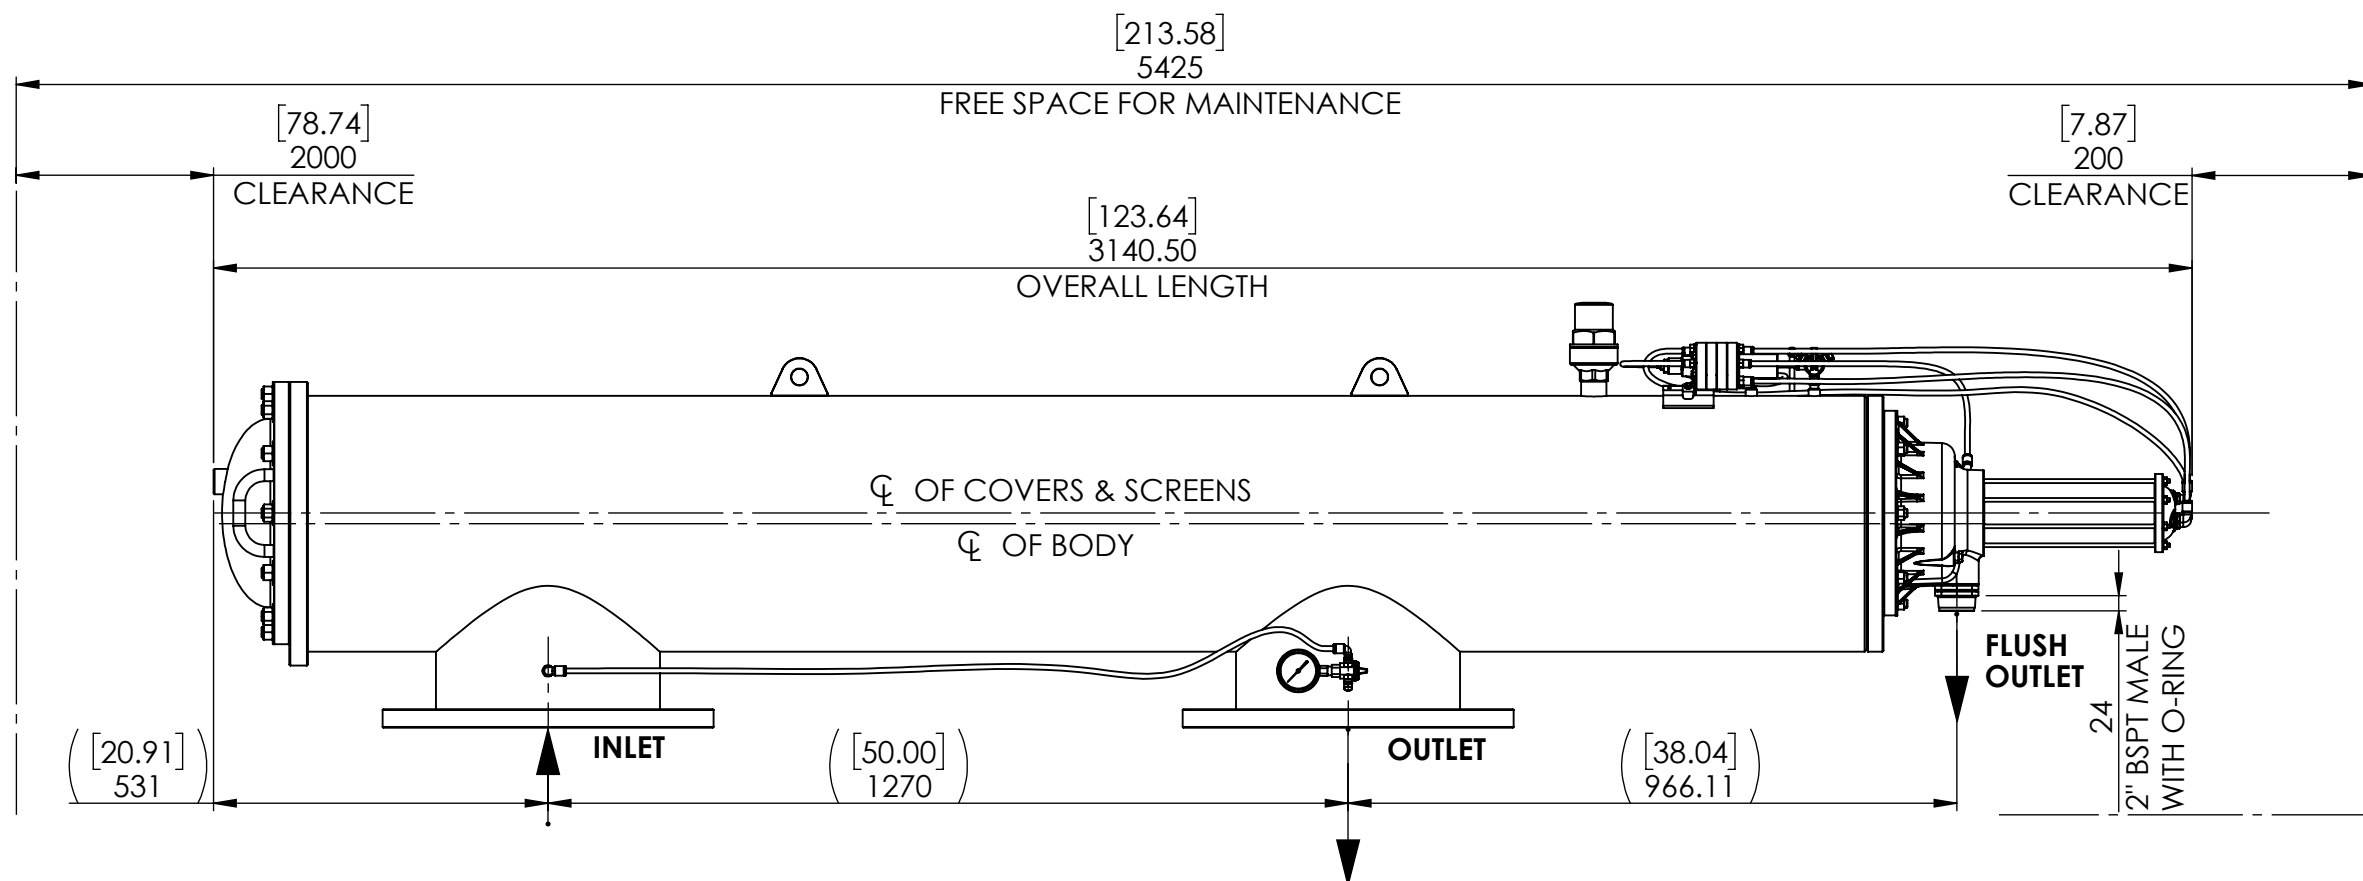

INLET

Flange Details Depend
Customer Selected Flange Type

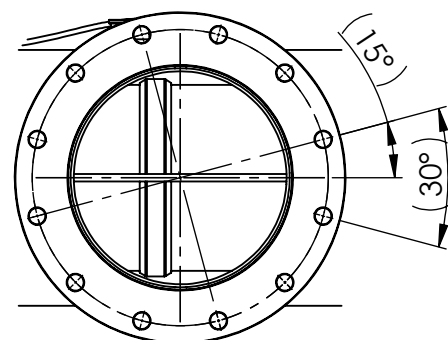

OUTLET


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FILTAWORX PTY. LTD. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FILTAWORX PTY.
LTD. IS PROHIBITED.

DIMENSIONS ARE IN [inches]/mm

MATERIAL
STAINLESS STEEL BODY
GLASS REINFORCED NYLON LID

FINISH

TOL. MACHINING	±0.25
TOL. ANGULAR	±0.25°



FILTAWORX

TITLE
FW350 WATER FILTER
AUTOMATIC SELF CLEANING
DN350 TABLE E / ISO PN10 / ANSI CL150

SIZE A3	DWG. NO. GA-05208-H	REV. 0
------------	------------------------	-----------

SCALE: 1:12.	WEIGHT: SEE TECHNICAL DATA	SHEET: 1 OF 1
--------------	----------------------------	---------------