


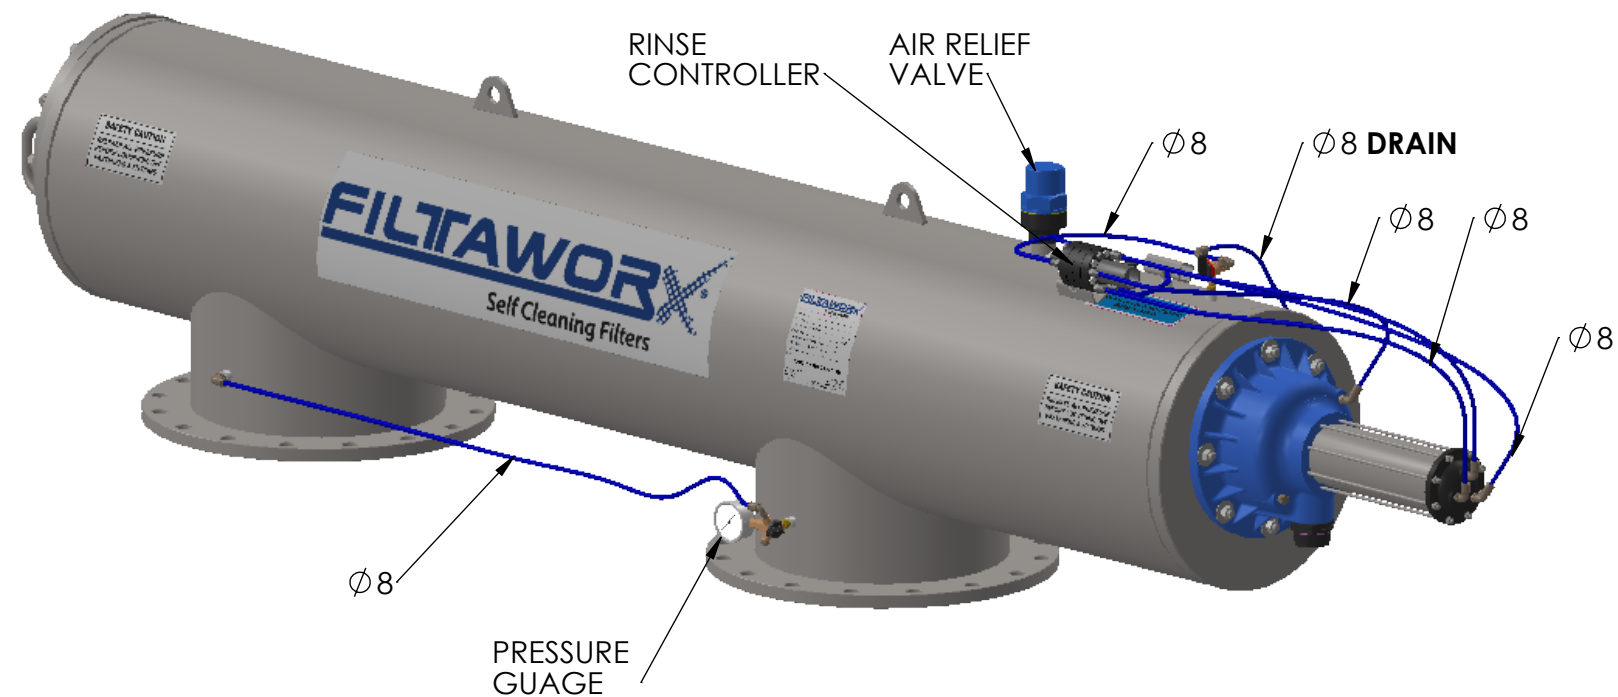

TECHNICAL DATA:

Normal Flow Rate: 4843 GPM / 1100 cubic m/hr at 2m Head Loss

Filter Area: 1886.35 sq in / 12170 sq cm
Screen Size Available: 50, 80, 100, 120, 150, 200, 400, 800 micron

Max. Working Pressure: 150psi / 10 bar
Min. Upstream Line Pressure Required During Rinse Cycle: 30 psi / 2 bar




Max. Working Temperature: 150°F / 65°C

Approximate Rinse Cycle Time: 15 - 17 Sec.

Inlet & Outlet Connection: DN400 Table E / ISO PN10 / ANSI CL150


Flush Drain Outlet Connection: 2" BSPT Male
Main Drain Header: DN50 2" Nominal Bore

Approximate Weight: Empty ----- 763 lbs / 346 kg
Full of Water --- 1636 lbs / 742 kg

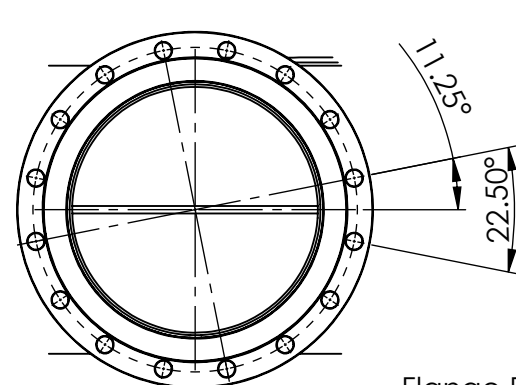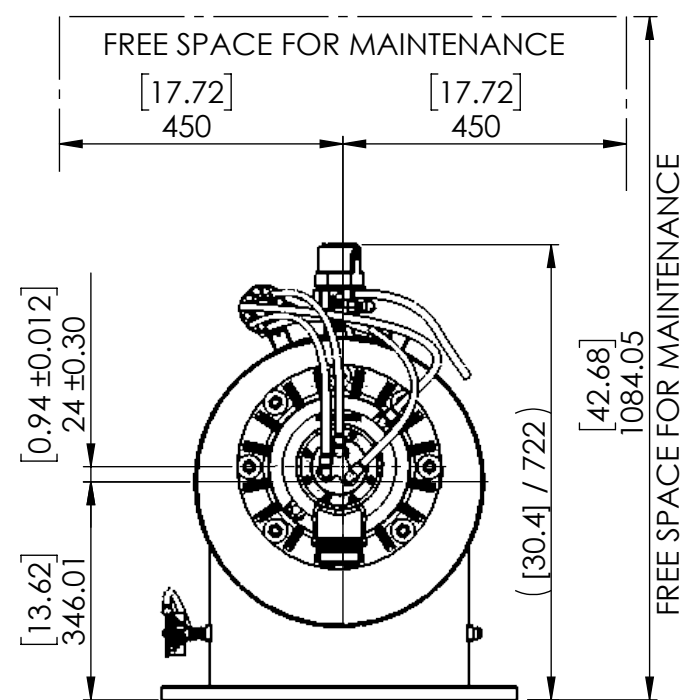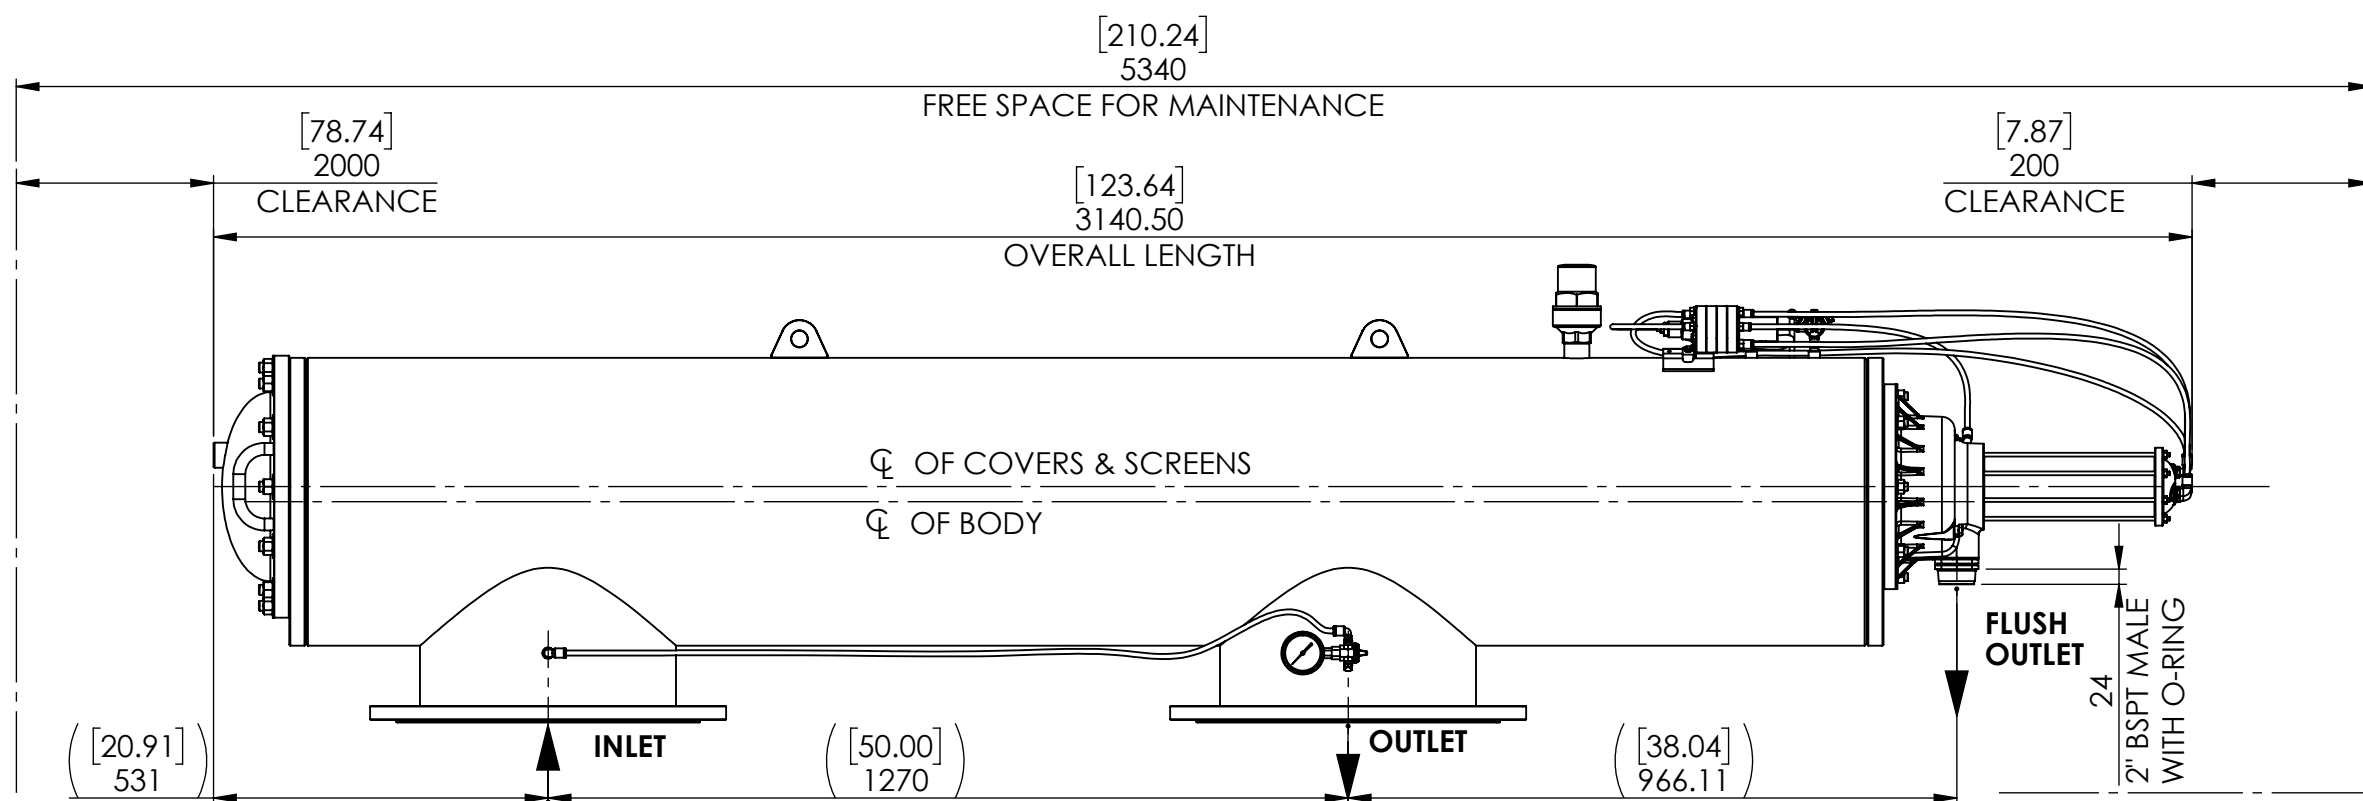

INLET

Flange Details Depend
Customer Selected Flange Type

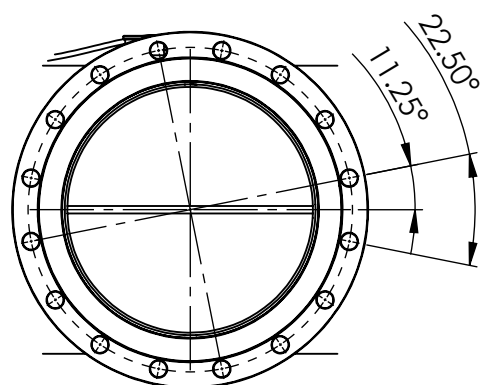

OUTLET


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FILTAWORX PTY. LTD. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FILTAWORX PTY.
LTD. IS PROHIBITED.

DIMENSIONS ARE IN [inches]/mm

MATERIAL
STAINLESS STEEL BODY
GLASS REINFORCED NYLON LID

FINISH

TOL. MACHINING ±0.25
TOL. ANGULAR ±0.25°



FILTAWORX

TITLE
FW400 WATER FILTER
AUTOMATIC SELF CLEANING
DN400 TABLE E / ISO PN10 / ANSI CL150

SIZE A3 DWG. NO. GA-05308-H REV. 0

SCALE: 1:12. WEIGHT: SEE TECHNICAL DATA SHEET: 1 OF 1